

DIGITUS 4K HDMI Adapter Cable - HDMI to DisplayPort

AK-330111-020-S
EAN 4016032481119



HDMI to DP Adapter Cable, ext. Power via USB - A 2.0m, Ultra HD, 4K@30Hz, bi

With the DIGITUS 4K HDMI Adapter Cable - HDMI to DisplayPort, you can connect your notebook with a second monitor to give you a second screen for more efficient work. Documents, tables and websites can be displayed on multiple screens. The adapter cable supports resolutions up to 4K at 30 Hz. Enjoy sharp image quality with richer colors and considerably more detail than conventional HDs. The adapter transfers Ultra HD content to your DisplayPort monitor and supports 7.1 channel surround audio. The HDMI source can supply this product with sufficient power under most circumstances, the USB-A connection is only connected if not enough power is available

With this digital HD high-performance audio/video cable, connect your HDMI output device to your DP input device.

- Supports: Resolutions up to 4K@30Hz.
- Supports: Resolutions up to 2K@30Hz.
- Supports: Resolutions up to 1920 x 1080 @ 120 Hz.
- Supports: 7.1 channel surround audio.
- Supported color depth: 48 Bit Deep Color
- Supports: 3D video timings
- Supports: eDP operation

- Supports: Video Convert - RGB / YCC (4:4:4) => 16-bit color
- Supports: Color conversion - YUV to RGB and from RGB to YUV
- Compatible with HDMI 1.4 and DisplayPort 1.2
- Compatible with HDCP 1.4 and DPCP
- Connection 1: HDMI Type A (plug)
- Connection 2: DisplayPort (plug)
- Connection 3: USB A (power supply)(plug)
- Length: 2 m
- Color: Black
- AOC - Active Optic Cable: No

Attributes




- Color cable: black
- Connector 1: HDMI type A, plug
- HDMI Standard: High Speed HDMI
- HDTV Resolution max.: 3840 x 2160 Pixel, 30Hz
- HDTV Standard: Ultra HD 4K
- Length: 2 m
- AOC - Active Optic Cable: no

Package contents

- 1x 4K HDMI Adapter Cable - HDMI to DisplayPort

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	60	7.92	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.13	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.13	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	432.00

More images:

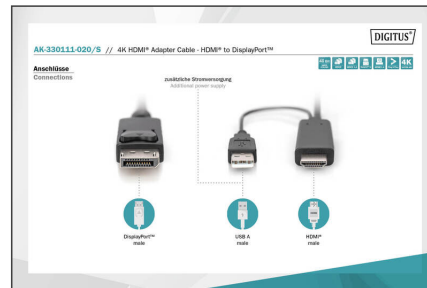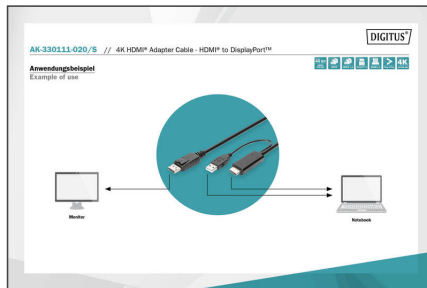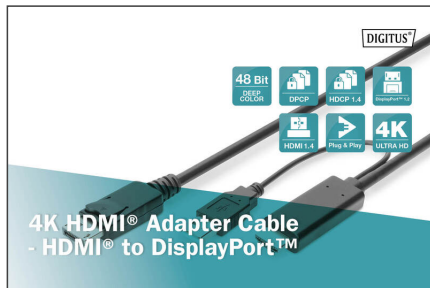

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com