

# Industrial 4+2 port Gigabit Ethernet switch

DN-651148  
EAN 4016032489245



## Industrial 4+2-Port Gigabit Ethernet Switch 4-Port GE RJ 54, 2 GE SFP Port

The DN-651148 is a robust 4+2 port Industrial Gigabit Ethernet switch for harsh environments. With non-blocking wire-speed performance, it offers 4x 10/100/1000 BASE-TX RJ45 + 2x 1000Base-Fx ports. The IP40 enclosure with redundant power supply is ideal for monitoring, control management and wireless services at -40° to 80°.

**4x 10/100/1000 BASE-TX RJ45 + 2x 1000Base-Fx ports. The IP40 enclosure with redundant power supply is ideal for monitoring, control management and wireless services at -40° to 80°.**

- Supports IEEE802.3x flow control, and backpressure
- Supports store-and-forward technology for optimized data transfer
- Automatic speed and half/full duplex detection/adjustment
- Bandwidth: 14 Gbps
- Packet buffer: 1.2 Mbit
- Packet forwarding size: 10.5 Mbps
- Size of the MAC address table: 2K
- Jumbo frame rate: 9000 byte
- ESD protection: 6 kV (DC)
- EFT protection: 6 kV (DC)
- Metal housing, IP40
- 4 kV lightning protection and surge protection
- Redundant power supply with reverse polarity protection function

- Power supply: 12 to 48 V
- Power consumption: <5 W
- Removable terminal connection
- Protection class: IP40
- Dimensions: 142.5 x 107.1 x 53.5 mm
- Operating temperature: -40 to 80 ° C
- Storage temperature: -40 to 80 ° C
- Humidity: 5% to 95% (non-condensing)
- MTBF: 300,000


### Attributes

- Number of ports: 4
- Ethernet speed: Gigabit
- Industrial usage: yes
- Managed: no
- Number of ports (Uplink): 2
- Outdoorsuitable: no
- PoE (Power over Ethernet): no
- Protection against vandalism: no
- Uplink port connection: SFP
- VLAN: no

### Package contents

- 1x Industrial Gigabit Ethernet Switch
- 1x user manual

## More images:

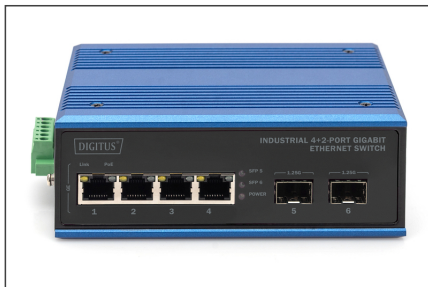



## Safety notes