


# DIGITUS 19-Inch Equipment Wall Mounting Bracket, 2U

DN-48003  
EAN 4016032490333

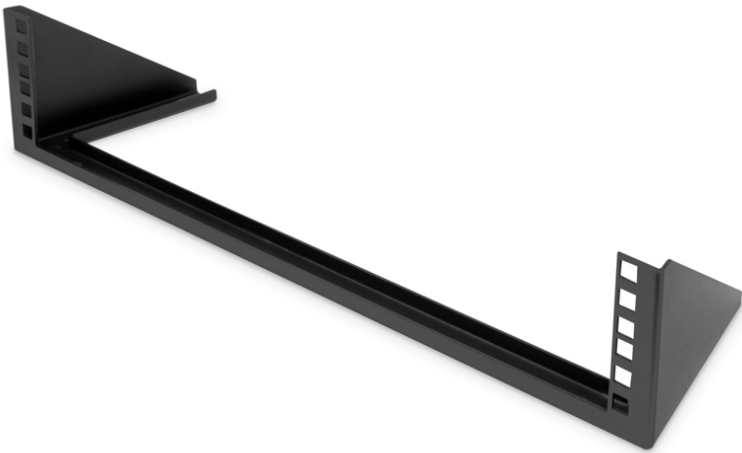

**2U vertical wall mounting bracket 105 x 504 x 151 mm, black**

The 19-inch mounts from DIGITUS® enable vertical positioning of your equipment on the wall. This is especially ideal for limited spatial conditions. Alternatively, you can install the mount under a desktop, for example, to accommodate your devices horizontally in a compact manner. This allows optimal organization of workspaces, streaming set-ups etc. Audiovisual accessories (AVS) or active and passive network components can be installed in the blink of an eye. The portfolio includes various sizes to meet any requirements.

**The 19-inch mounts from DIGITUS® enable vertical positioning of your equipment on the wall. Alternatively, the devices can be installed horizontally, for example under the desktop.**

- Robust design made of sheet steel with load capacity up to 20 kg
- Product dimensions (H x W x D): 105 x 504 x 151 mm
- Product dimensions incl. packaging (H x W x D):

- Weight (net/gross): 0.7 kg / 1.3 kg
- Color: Black (RAL 9005)

**Attributes**


- Color: black, RAL 9005
- Front door: without
- Load capacity: 20 kg
- Side panels: Without
- Units: 2
- Width: 504 mm
- IP protection class: without
- Mounted: yes

**Package contents**

- 1 x 19-inch mount
- 1 x Set equipment screws

| Logistics                    |              |             |            |            |             |        |
|------------------------------|--------------|-------------|------------|------------|-------------|--------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³    |
| Packaging Unit Carton        | 8            | 6.72        | 0.00       | 0.00       | 0.00        | 0.00   |
| Packaging Unit Inside        | 1            | 0.84        | 0.00       | 0.00       | 0.00        | 0.00   |
| Packaging Unit Single        | 1            | 0.84        | 0.00       | 0.00       | 0.00        | 0.00   |
| Net single without Packaging | 0            | 0.00        | 0.00       | 0.00       | 0.00        | 208.44 |

**More images:**

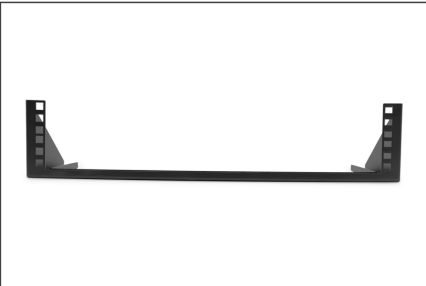



#### Safety notes

- Ensure adequate ventilation to prevent the installed devices from overheating.
- Network cabinets should not be overfilled and the ventilation openings must not be blocked.
- Cables should be neatly routed and organized in cable ducts or trays.
- Use surge protection devices to protect sensitive devices from power surges or lightning strikes.
- Avoid moisture or wetness while observing the respective IP protection class.
- Ensure that the cabinet and the devices used are properly earthed.
- In regions with frequent thunderstorm activity, professional lightning protection should be integrated into the power supply.
- To avoid uneven loading, always mount the heaviest units at the bottom of the cabinet.
- Disconnect the installed devices from the power supply during maintenance or installation work.

#### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schöffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)