

DIGITUS USB silicone cable, USB 40Gbps, 1m, black

AK-300344-010-S  
EAN 4016032496106



**USB Silicone connection cable, USB-C - USB-C 1m, USB 4.0 Gen3, 40G, 240W, 8K, black**

Reliable and easy connection to your USB-C devices with your PC thanks to the soft and flexible silicone cable. Data transfer rates of 40 Gbits/s for synchronization and data transfer, an 8K screen resolution and a power delivery specification of 240W for charging are possible with this high-quality all-rounder cable.


**Fast charging and synchronization with the high-quality and soft silicone connection cable. 8K video transmission is possible with USB version 4.0 Gen3**

- Supports data transfer rates of 40 Gbps
- Backwards compatible with USB 3.2/USB 3.1, USB 3.0, USB 2.0 and USB 1.1
- Supports the USB power delivery function with 48V, 5A and 240W

- Supports 8K (7680x4320) @60Hz and 4K (3840x2160) @120Hz
  - Durable cable with a service life of up to 10,000 bends (based on internal tests)
  - Type C plug can be used on both sides
- Attributes**
- AWG: 30
  - Color cable: black
  - Connector 1: USB C, plug
  - Connector 2: USB C, plug
  - Connector surface: nickel-plated
  - Ferrite filter: none
  - USB compliance: USB 4.0
  - Length: 1 m
  - Shielding: triple shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	150	4.50	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.03	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.03	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	630.00

More images:

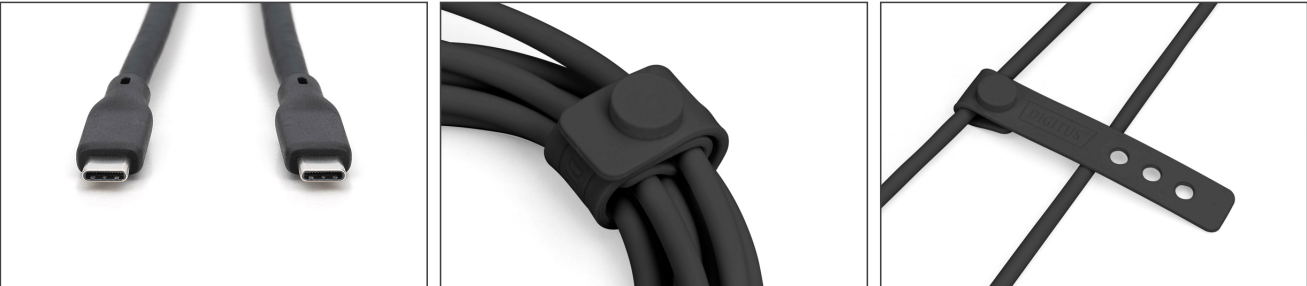



### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable.
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)