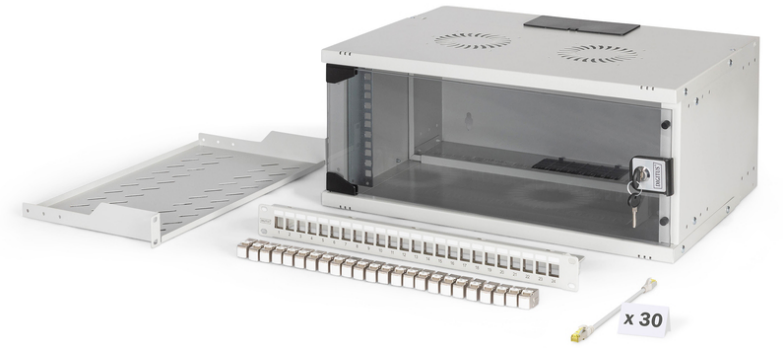
DIGITUS® SOHO Pro Network Set, 483 mm (19") - 4U, 540 x 400 mm (W x D)

DN-49200-SET

EAN 4016032499619



19" network bundle, 4U cabinet and equipment, gr SOHO Pro version, unmounted

Whether at home, in the office, or in tight spaces: With the compact 483 mm (19") solutions from the SOHO Pro Series, you can set up your network wherever you want. Setup takes just a few steps and is a breeze thanks to the included step-by-step instructions. Available in four rack unit heights (4U, 7U, 9U, 12U), these network sets include perfectly coordinated DIGITUS components to ensure quick and easy setup of a fully functional IT cabling system. The network cabinet and its accessories (e.g., switch, patch panel, power strip, shelf, cable management panel, patch cables, etc.) are delivered in a compact box.

Complete set for setting up a compact 483 mm (19") network, including cabinet, shelf, patch panel, Keystone modules, and patch cables.

- Dimensions of wall-mounted enclosure (H x W x D): 240 x 540 x 400 mm (shipped unassembled)
- Keystone Module: Category 6A 10GBase-T, 500 MHz, compatible with PoE/PoE+/4PPoE (IEEE 802.3af, 802.3at, 802.3bt), GHMT certified
- Patch Cable: CAT 6A S-FTP, Cu, LSZH, AWG 26/7, Length 0.25 m, Color: Gray

Attributes

- Cabinet type: Wall mounting cabinet
- Color: light grey, RAL 7035
- Depth: 400 mm
- Front door: Glass door, single opening
- Load capacity: 60 kg
- Side panels: Both sides
- Units: 4
- Width: 540 mm
- IP protection class: IP20
- Mounted: no

Package contents

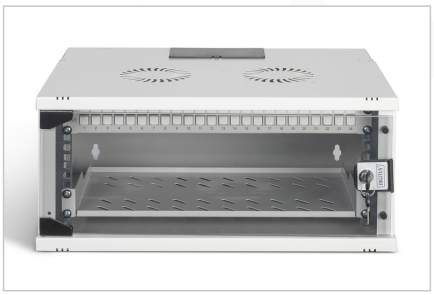
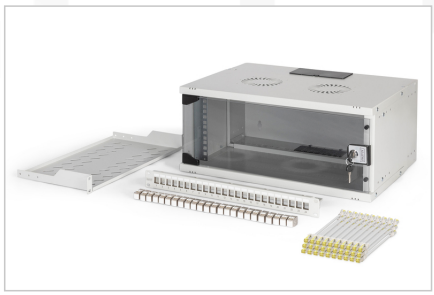
- 1 x wall-mounted enclosure, unassembled (includes 1 x key)
- 1 x shelf
- 1 x Patch Panel
- 24 Keystone Modules
- 30 patch cords

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.00	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	208.44

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

More images:

Safety notes

- Ensure adequate ventilation to prevent the installed devices from overheating.
- Network cabinets should not be overfilled and the ventilation openings must not be blocked.
- Cables should be laid neatly and organized in cable ducts or trays.
- Use surge protection devices to protect sensitive devices from power surges or lightning strikes.
- Avoid moisture or wetness while observing the respective IP protection class.
- Ensure that the cabinet and the devices used are properly earthed.
- In regions with frequent thunderstorm activity, professional lightning protection should be integrated into the power supply.
- To avoid uneven loading, always mount the heaviest units at the bottom of the cabinet.
- Disconnect the installed devices from the power supply during maintenance or installation work.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.