DIGITUS® Wall-mounted industrial cabinet, IP66, 300x400x200 mm

DN-304020

EAN 4016032511854



Industrial wall-mounted enclosure, 300x400x200 mm IP66, incl. mounting plate, grey (RAL 7035)

The DIGITUS® industrial cabinet is a compact steel enclosure designed for use in the most demanding indoor and outdoor environments. With its built-in mounting plate, the enclosure allows for the flexible installation of a wide variety of devices, depending on application requirements. Furthermore, the mounting plate is removable. This makes repair and maintenance work easier to perform. Each cabinet is made of robust cold-rolled steel and, thanks to the corner press process used in production, features few weld seams. A flange plate is located in the cabinet base for secure cable entry. The DIGITUS® industrial cabinet range includes various enclosure sizes for optimal customization for your next project, whether for building automation, control panel construction, or extensive automation and industrial systems.

Compact industrial enclosure for use in demanding environments. Versatile installation options thanks to the integrated mounting plate. Ideal for building services, control panel construction, automation, and industrial systems.

- Protection rating: IP66
- Protection Class (IK Impact Resistance Rating): IK10
- NEMA Protection Rating: 4X
- Cold-rolled steel with a wall thickness of 1.2 mm
- Max. weight capacity: 18 kg
- Door opening angle: 110°
- Door with a PU foam seal around the entire perimeter
- Operating temperature range: -40 °C to +80 °C
- Heat-curing powder coating with a surface finish in RAL 7035 gray
- Front-locking cylinder lock with double-bit key
- Includes grounding cable
- Usable mounting depth: 165 mm
- Mounting plate material thickness: 1.5 mm
- Mounting Plate Dimensions (H x W): 250 x 350 mm
- Product dimensions (H x W x D): 300 x 400 x 200 mm
- Package dimensions (H x W x D): 330 x 430 x 230 mm
- Net Weight/Gross Weight: 8.0 kg/8.5 kg

Attributes

- Cabinet type: Industrial enclosure, wall-mounted
- Load capacity: 18 kg
- IP protection class: IP66
- Mounted: yes

Package contents


- 1 x enclosure
- 1 x key
- 1 x grounding cable
- 4 x wall mount bracket

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	7.60	22.00	42.00	31.50	29.11
Packaging Unit Inside	1	7.60	22.00	42.00	31.50	29.11
Packaging Unit Single	1	7.60	22.00	42.00	31.50	29.11
Net single without Packaging	0	7.10	20.00	40.00	30.00	24.00

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

More images:

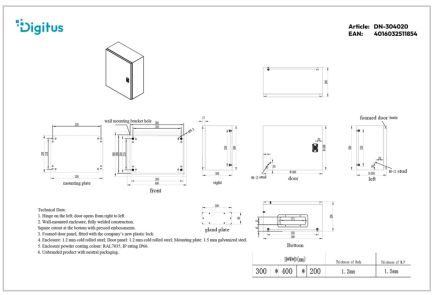










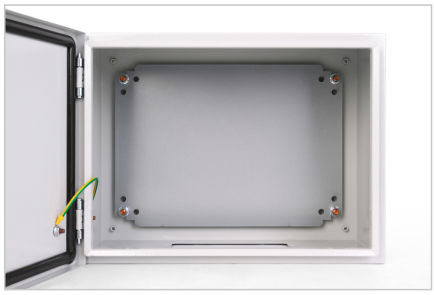














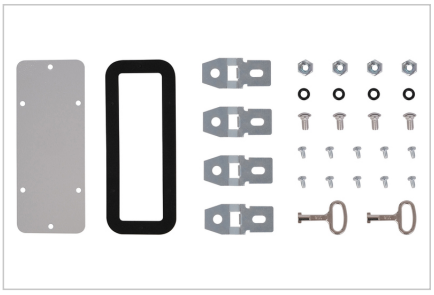

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com