DIGITUS® Wall-mounted industrial cabinet, IP66, 500x500x250 mm

DN-505025

EAN 4016032511878



Industrial wall-mounted enclosure, 500x500x250 mm IP66, incl. mounting plate, grey (RAL 7035)

The DIGITUS® industrial cabinet is a compact steel enclosure designed for use in the most demanding indoor and outdoor environments. With its built-in mounting plate, the enclosure allows for the flexible installation of a wide variety of devices, depending on application requirements. Furthermore, the mounting plate is removable. This makes repair and maintenance work easier to perform. Each cabinet is made of robust cold-rolled steel and, thanks to the corner press process used in production, features few weld seams. A flange plate is located in the base of the enclosure for secure cable entry. The DIGITUS® industrial cabinet range includes various enclosure sizes for optimal customization for your next project, whether for building automation, control panel construction, or extensive automation and industrial systems.

Compact industrial enclosure for use in demanding environments. Versatile installation options thanks to the integrated mounting plate. Ideal for building services, control panel construction, automation, and industrial systems.

- Protection rating: IP66
- Protection Class (IK Impact Resistance Rating): IK10
- NEMA Protection Rating: 4X
- Cold-rolled steel with a wall thickness of 1.2 mm
- Max. weight capacity: 30 kg
- Door opening angle: 110°
- Door with a PU foam gasket running all the way around
- Operating temperature range: -40 °C to +80 °C
- Heat-curing powder coating with a surface finish in RAL 7035 gray
- Front-locking cylinder lock with double-bit key
- Includes grounding cable
- Usable mounting depth: 215 mm
- Mounting plate material thickness: 1.5 mm
- Mounting Plate Dimensions (H x W): 450 x 450 mm
- Product dimensions (H x W x D): 500 x 500 x 250 mm
- Package Dimensions (H x W x D): 530 x 530 x 280 mm
- Net Weight/Gross Weight: 15.1 kg/15.9 kg

Attributes

- Cabinet type: Industrial enclosure, wall-mounted
- Load capacity: 30 kg
- IP protection class: IP66
- Mounted: yes


Package contents

- 1 x enclosure
- 1 x key
- 1 x grounding cable
- 4 x wall mount bracket

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	14.30	27.00	52.00	51.50	72.31
Packaging Unit Inside	1	14.30	27.00	52.00	51.50	72.31
Packaging Unit Single	1	14.30	27.00	52.00	51.50	72.31
Net single without Packaging	0	13.30	25.00	50.00	50.00	62.50

More images:

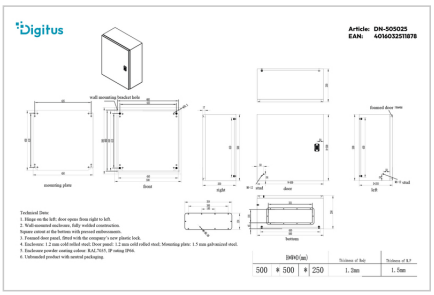
Digitus
Article: DN-505025
EAN: 4016032511878


Digitus
READY TO GO
Everything included for a quick and easy installation
Wall-Mounting Brackets
Grounding Cable
Bottom Flange Plate
Keys
Mounting Hardware


Digitus
COMPACT ENCLOSURE
TOUGH ENVIRONMENTS
Ideal for building technology, control panels, automation and industrial applications


Digitus
-40°C TO +80°C
BUILT FOR EXTREMES
Reliable protection in extreme temperatures and wet conditions
NEMA 4X
Outdoor & corrosion protection
IP66
Dust-tight & water-jet protected
IK10
High impact resistance


Digitus
COMPACT INDUSTRIAL DESIGN
Versatile installation with integrated mounting plate
50 cm
50 cm
25 cm
Mounting Plate Dimensions: 45 x 45 cm
Usable mounting depth: 21.5 cm


Digitus
BUILT TO LAST
Robust cold-rolled steel construction with reduced weld seams
Front-locking cylinder lock with double-bit key
Removable mounting plate
Perimeter-sealed PU gasket
Flange plate for cable entry










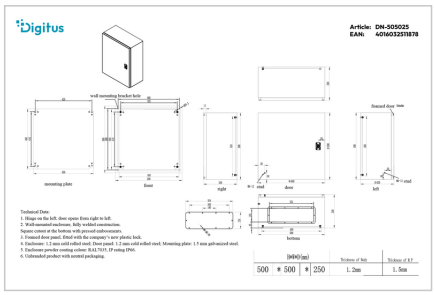


Digitus
Article: DN-505025
EAN: 4016032511878













EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com