

Planet Industrial 24-Port 10/100/1000Mbps + 4-Port Shared SFP Managed Gigabit Switch

PL-IGSW-24040T
EAN 471121368898



Planet IP30 19 inchs Industrial Switch, 24 x Gigabit, 4 x SFP, -40/+75°C, Managed

Now available as a hardware version 3 available (april 2016) with even more features and 50% lower power consumption! 24 Port Gigabit Ethernet Switch, IP30 industrial enclosure for 19 inch mounting 1U, fanless, 24 x 10/100/1000 Mbps (RJ45), Auto MDI / MDI-X, 4 x SFP slots for MGB and MFB Module (shared), operating - 40 to + 75 ° C (DC) respectively. -10 To + 60 ° C (AC), AC power supply integrated 100-240V, DC power input 36-60V (DC power supply optional), power consumption max. 20 Watt, 2xDI, 2xDO, VLAN, LACP, STP, RSTP, ERPS, IEEE 1588, QoS, IGMP Snooping, ACL, static Layer 3 routing, u.v.m. Web Management, SNMP, IPv4 / v6. Dimensions 440 x 200 x 44.5 mm, weight 2.8kg.

Layer 2 / Layer 4 Managed Switch for Building Automation Networking

- 24-Port 10/100/1000Base-T Gigabit Ethernet RJ-45
- 4x 100/1000Base-SX/LX SFP slots, shared with Port-21 to Port-24
- RS-232 DB9 console interface for switch basic management and setup
- Prevents packet loss with back pressure (Half-Duplex) and IEEE 802.3x PAUSE frame flow control (Full-Duplex)


- 19" Rackmountable
- Storm Control support (Broadcast/ Multicast/ Unknown-Unicast)
- Supports VLAN (IEEE 802.1Q Tagged VLAN, up to 255 VLANs groups, out of 4041 VLAN IDs, Provider Bridging (VLAN Q-in-Q) support (IEEE 802.1ad), Private VLAN Edge (PVE))
- Supports Spanning Tree Protocol (STP, IEEE 802.1D, RSTP, IEEE 802.1w, MSTP, IEEE 802.1s, BPDU Guard)
- Supports Link Aggregation (802.3ad Link Aggregation Control Protocol (LACP), Cisco ether-channel (Static Trunk), maximum 12 Trunk groups, up to 16 ports per Trunk group, up to 16Gbps bandwidth (Duplex Mode))
- Provides port mirror (many-to-1)
- -40 to 75 °C operating temperature

Attributes

- Industrial usage: no
- Managed: no
- Outdoorsuitable: no
- PoE (Power over Ethernet): no
- Protection against vandalism: no
- VLAN: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	5	19.90	90.00	45.00	52.00	210.60
Packaging Unit Inside	1	3.98	90.00	45.00	52.00	210.60
Packaging Unit Single	1	3.98	90.00	45.00	52.00	210.60
Net single without Packaging	0	3.98	90.00	45.00	52.00	210.60

More images:

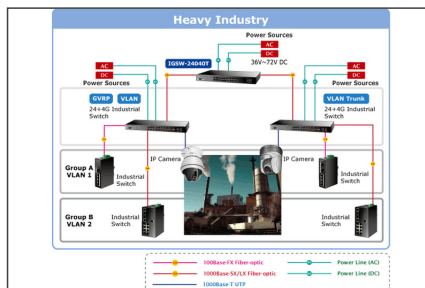

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Gewerbepark 8
Kalsdorf bei Graz, Austria
<https://www.assmann24h.at>
office@assmann24h.at