

Planet Industrial 8 Port Gigabit PoE Switch, Managed, 2 Uplinks

PL-IGS-10020PT
EAN 4711213689550



Planet IP30 Industrial POE Switch, 8xGiga, 2xSFP, 802.3af, -40/+75°C, Managed

IP30 industrial enclosure for DIN rail mounting (DIN rail), 8 x 10/100/1000 Mbps (RJ45) with PoE Injector 802.3af, Auto MDI/MDI-X, 2 x SFP slots for MGB and MFB modules, operating temperature -40 to +75°C, DC power supply optional, 48V, power consumption 32 watts (109 BTU) without PoE, 162 watts (522 BTU) with PoE full load. Abundant functions like VLAN, LACP, STP, RSTP, QoS, IGMP snooping, ACL, Web Management.

The best Solution for rough Environmental Conditions!

- 8-Port 10/100/1000BASE-T Gigabit Ethernet RJ-45 with IEEE 802.3af / 802.3at PoE Injector
- 2x 100/1000BASE-X mini-GBIC/SFP slots, SFP type auto detection
- RJ-45 serial console interface for Switch basic management and setup
- Complies with IEEE 802.3af / 802.3at Power over Ethernet End-Span PSE
- Up to 8 IEEE 802.3af devices powered
- Supports PoE Power up to 15.4 watt for each PoE port
- Auto detect powered device (PD)
- Short-Circuit protection


- Remote power feeding up to 100m
- Supports PoE Management (Total PoE Power Budget Control, per Port PoE function enable/disable, PoE Port Power feeding priority, per PoE port power limit, PD classification detection, over Temperature Protection function, Temperature Threshold Control, PoE Usage Threshold Control, PD Alive Check, PoE schedule)
- -40 to 75 °C operating temperature

Attributes

- Number of ports: 8
- PoE Power budget: 30 W
- PoE standard: IEEE802.3at (PoE+)
- Ethernet speed: Gigabit
- Industrial usage: yes
- Installation type: DIN rail
- Managed: yes
- Number of ports (Uplink): 2
- Outdoorsuitable: no
- PoE (Power over Ethernet): yes
- Protection against vandalism: no
- Uplink port connection: SFP
- VLAN: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	10	16.90	17.00	30.00	9.00	4.59
Packaging Unit Inside	1	1.56	17.00	30.00	9.00	4.59
Packaging Unit Single	1	1.56	17.00	30.00	9.00	4.59
Net single without Packaging	0	1.56	17.00	30.00	9.00	4.59

More images:

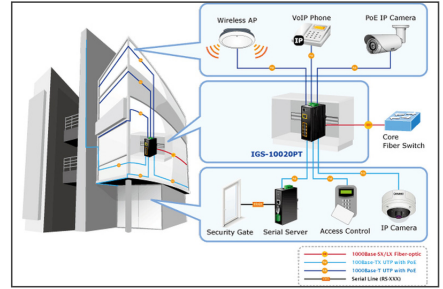

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Gewerbepark 3
Kalsdorf bei Graz, Austria
<https://www.assmann24h.at>
office@assmann24h.at