

# Planet 24-Port 802.3at PoE + 4-Port Gigabit TP/SFP Combo Managed Switch

PL-GS-4210-24PL4C  
EAN 4711605280617



## Planet 19 Inch POE+ Switch, 802.3at, 28xRJ45 Gigabit, 4xSFP, Managed, 440 Watt

28 Port Gigabit Ethernet Switch 19 inch 1U, 28 x 10/100/1000 (RJ45), 24 of those are with 802.3at PoE+ Injector, compatible with 802.3af, 4 x SFP slots (shared) for MFB/MGB modules (100/1000 Mbps). PoE power budget of 440 Watts (at 25°C), respectively. 380 watts (at 50°C). Extensive functions such as VLAN, LACP, QoS, IGMP Snooping, ACL, RSTP, LLDP, and more. Web / Telnet / Console Management, IPv4 / IPv6, SNMP. Power consumption max. 544 watts. Includes 19-inch mounting bracket. Weight 4814g, dimensions 440x300x44.5mm.

### Perfect Managed PoE Switch with Advanced L2/L4 Switching and Security

- 28-port 10/100/1000BASE-T Gigabit RJ45 copper with 24-port IEEE 802.3at/af PoE injector
- 4x 100/1000Base-X mini-GBIC/SFP slots, shared with Port-25 to Port-28
- Complies with IEEE 802.3at High Power over Ethernet End-Span PSE
- Backward compatible with IEEE 802.3af Power over Ethernet
- Up to 24 ports of IEEE 802.3at/802.3af devices powered
- Supports PoE power up to 30.8 watt for each PoE port
- Auto detect powered device (PD)
- Short-Circuit protection
- Remote power feeding up to 100m



- Supports PoE Management (Total PoE Power Budget Control, per Port PoE function enable/disable, PoE Port Power feeding priority, per PoE port power limit, PD classification detection)
- Prevents packet loss with back pressure (Half-Duplex) and IEEE 802.3x PAUSE frame flow control (Full-Duplex)
- High performance Store and Forward architecture
- Supports VLAN (IEEE 802.1Q Tagged VLAN, Provider Bridging (VLAN Q-in-Q) support (IEEE 802.1ad), Protocol VLAN, Voice VLAN, Private VLAN, Management VLAN, GVRP)
- Supports Spanning Tree Protocol (STP, IEEE 802.1D Spanning Tree Protocol, RSTP, IEEE 802.1w Rapid Spanning Tree Protocol, IEEE 802.1s Multiple Spanning Tree Protocol, STP BDU Guard, BPDU Filtering and BPDU Forwarding)
- Supports Link Aggregation (IEEE 802.3 ad Link Aggregation Control Protocol (LACP), Cisco ether-channel (Static Trunk), maximum 8 Trunk groups, up to 8 ports per trunk groups)
- Provides port mirror (many-to-1)

### Attributes

- Industrial usage: no
- Managed: no
- Outdoorsuitable: no
- PoE (Power over Ethernet): no
- Protection against vandalism: no
- VLAN: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	2	9.62	57.00	39.50	10.00	22.52
Packaging Unit Inside	1	0.50	57.00	39.50	10.00	22.52
Packaging Unit Single	1	0.50	57.00	39.50	10.00	22.52
Net single without Packaging	0	4.60	44.00	30.00	4.45	5.87

**More images:**

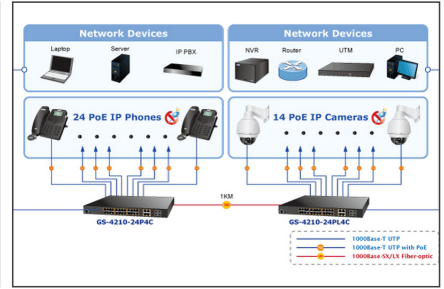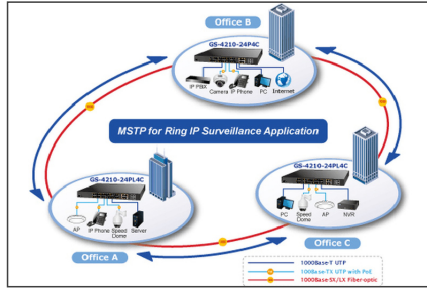

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Gewerbepark 3  
Kalsdorf bei Graz, Austria  
<https://www.assmann24h.at>  
[office@assmann24h.at](mailto:office@assmann24h.at)