

NOCTUA Teaming up eleven stator guide vanes with a specially conceived seven blade impeller, the NF-F12's Focused Flow™ system creates outstanding static

pressure and focuses 1 performance on heats

time. a wide range of



**second gen
ew, custom
control gua
The NF-F12
anti-vibrati**

**for full flexibility. Its c
exhaustive set of feati**

**premium quality make it an elite choice for use on air
coolers, radiators and other pressure demanding
applications.**




- Size 120x120x25mm
- Connector 4-pin PWM
- Fan Type 12V
- Blade Geometry Heptaperf™
- Impeller Geometry Focused Flow™
- Rotational Speed (+/- 10%) 1500 RPM
- Rotational Speed with L.N.A. (+/- 10%) 1200 RPM
- Min. Rotational Speed (PWM) 300 RPM
- Airflow 93,4 m³/h

- Airflow with L.N.A. 74,9 m³/h
- Acoustical Noise 22,4 dB(A)
- Acoustic Base with L.N.A. (L)
- Static Pressure 2,61 mm H2O
- Static Pressure with L.N.A. 1,83 mm H2O
- Max. Input Power 0,6 W
- Max. Input Current 0,05 A
- Voltage 12 V
- MTBF > 150.000 h

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	36	10.80	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.30	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.30	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

More images:

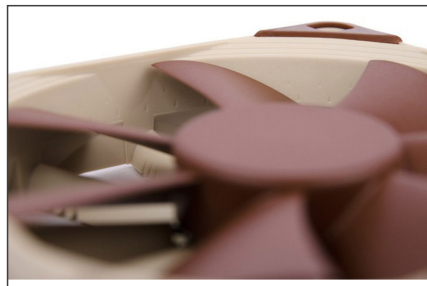



EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

Rascom Computerdistribution Ges.m.b.H.
Linzer Straße 237
Wien, Austria
<https://noctua.at>
info@rascom.at