

TP-Link Omada 4G+ Cat6 AX3000 Wi-Fi 6 Outdoor/Indoor Gateway

ER703WP-4G-OUTDOOR
EAN 8885020626858



Omada 4G+Cat6 AX3000 Outdoor/Indoor Gateway PORT: 3× Gigabit WAN/LAN port, 1 nano SIM slot (4G+ Cat6) SPECIFICATION: 802.3bt/AT/AF, 1 PoE IN (support 802.3bt), 2 ports with 45W PoE power SPEED: 574 Mbps at 2.4 GHz + 2402 Mbps at 5 GHz (HE160) Wi-Fi speed, 300 Mbps download LTE speed FEATURE: Integration with Omada SDN Controller, Omada APP, Support for SSL VPN, OpenVPN and Wireguard/IPsec/PPTP/ L2TP/L2TP over IPsec VPN, 4G+ Cat6 LTE, 2× detachable LTE antennas, 160MHz supported, OFDMA, MU-MIMO, Beamforming, Load Balance, Link Backup, Policy-Based Firewall, Static Routing, Policy Routing, Multi-net DHCP, VLAN, Stateful ACL, mDNS Repeater, Bridge VLAN, IP55 Weatherproof

Omada 4G+ Cat6 AX3000 Wi-Fi 6 Outdoor/Indoor Gateway

- EU LTE band: 4G LTE-FDD: B1/B3/B5/B7/B8/B20/B28/B32 (2100/1800/850/2600/900/800/700/1450MHz) 4G LTE-TDD: B38/B40/B41 (2600/2300/2500MHz) 3G DC-HSDPA/HSPA+/HSDPA/HSUPA/WCDMA: B1/B3/B5/B8 (2100/1800/850/900MHz)


- SIM Type: 1× Nano SIM Card
- Power supply: 802.3at/bt PoE; 12VDC / 2A AC adapter
- Interfaces: 3 Gigabit WAN/LAN ports
- Wi-Fi: 2.4 GHz: 574 Mbps / 5 GHz: 2402 Mbps (HE160)
- Wi-Fi: Two 5GHz 4.0dBi & 2.4GHz 2.3dBi dual-band built-in antennas / LTE: Two 4.0dBi omnidirectional, detachable antennas
- Maximum Power Consumption: 14.5W without PoE / 63W with PoE
- Operating Temperature: -30°C to 60°C (-22°F to 140°F)
- Storage Temperature: -40°F to 158°F (-40°C to 70°C)

Package contents

- ER703WP-4G-OUTDOOR
- Short installation guide
- Mounting Kits

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	20	13.20	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.00	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	1.75

More images:

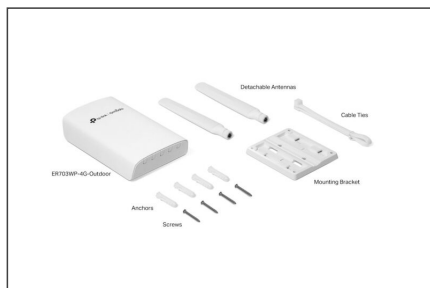

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

TP-Link Deutschland GmbH
Am Trippelsberg 100
Düsseldorf, Germany
<https://www.tp-link.com/de/>
support.de@tp-link.com