

# NOCTUA Noctua NH-L12S CPU Cooler

**NOC-NH-L12S**  
**EAN 9010018000054**





Successor to the award-winning NH-L12, the NH-L12S is a compact low-profile CPU cooler that combines excellent compatibility, surprising efficiency and remarkable flexibility. Thanks to its NF-A12x15 PWM, slim 120mm fan, the NH-L12S provides even better quiet cooling performance than the previous model with its 92mm fan. At the same time, the NH-L12S is highly versatile: with the fan installed on top of the fins, the cooler is compatible with RAM modules of up to 48mm in height. With the fan installed underneath the fins, the total height of the cooler is only 70mm, making it suitable for use in many HTPC and Small Form Factor cases. Topped off with the trusted, pro-grade SecuFirm2™ multi-socket mounting system, Noctua's proven NT-H1 thermal compound and a full 6-year manufacturer's warranty, the NH-L12S is a premium-quality low-profile solution for the highest demands. Cooler Specification: Socket compatibility: Intel LGA2066, LGA2011-0 & LGA2011-3 (Square ILM), LGA1156, LGA1155, LGA1151, LGA1150 & AMD AM2, AM2+, AM3,

AM3+, AM4, FM1, FM2, FM2+ (backplate required) Height (without fan): 70 mm Width (without fan): 128 mm Depth (without fan): 146 mm Height (with fan): 70 mm Width (with fan): 128 mm Depth (with fan): 146 mm Weight (without fan): 390 g Weight (with fan/s): 520 g Material: Copper (base and heat-pipes), aluminium (cooling fins), soldered joints & nickel plating Fan compatibility: 120x120x15 & 120x120x25 FAN Specification: Model 1x Noctua NF-A12x15 PWM Bearing SSO2 Max. Rotational Speed (+/- 10%): 1850 RPM Max. Rotational Speed with L.N.A. (+/- 10%): 1400 RPM Min. Rotational Speed (PWM, +/-20%): 450 RPM Max. Airflow: 94,2 m³/h Max. Airflow with L.N.A.: 70,8 m³/h Max. Acoustical Noise: 23,9 dB(A) Max. Acoustical Noise with L.N.A.: 16,8 dB(A) Input Power: 1,56 W Voltage Range: 12 V MTTF > 150.000 h Scope of delivery: 1x NF-A12x15 PWM premium fan Low-Noise Adaptor (L.N.A.) NT-H1 high-grade thermal compound SecuFirm2™ mounting kit Noctua metal case-badge

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	8	9.42	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	1.18	0.00	0.00	0.00	0.00
Packaging Unit Single	1	1.18	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

## More images:

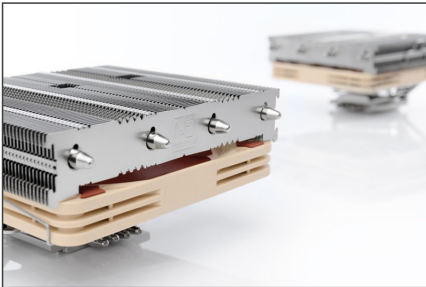

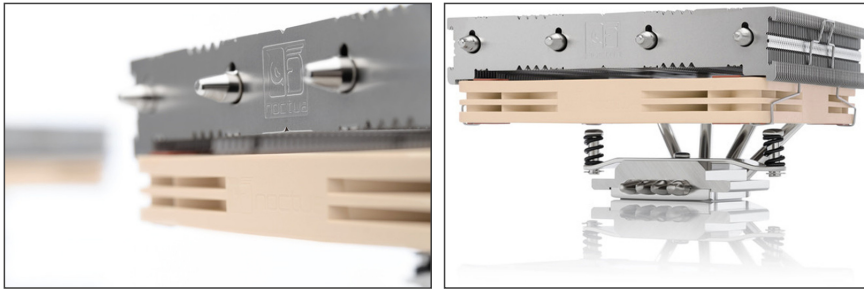

#### **EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

Rascom Computerdistribution Ges.m.b.H.  
Linzer Straße 237  
Wien, Austria  
<https://noctua.at>  
[info@rascom.at](mailto:info@rascom.at)