


MIKROTIK MikroTik RouterBOARD RB951Ui-2nD

M-RB951UI-2ND
EAN 9010386000755

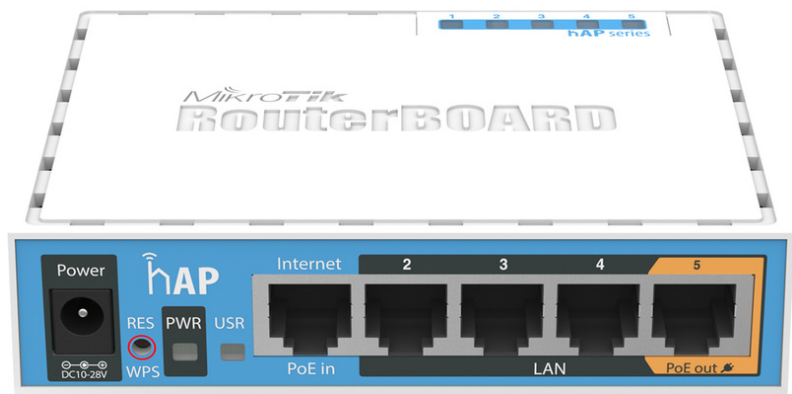

This small home access point is the perfect device for homes or small offices where all you need is a wireless AP and a few wired devices connected. Based on our popular RB951-2n, the new hAP is an improvement in many areas. MikroTik RouterOS version 5.x level 4 licence level 4 free upgrades to MikroTik RouterOS version 6.x licence never expires licence valid for one installation unlimited number of interfaces supports accesspoint (AP), wireless station/client, point 2 point and point 2 multipoint setups enhanced WIFI performace with MikroTik Nstreme and MikroTik Nv2 with TDMA support RIP and OSPF and BGP support unlimited number of EoIP tunnels up to 200 PPPoE tunnels up to 200 PPTP tunnels up to 200 L2TP tunnels up to 200 OVPN tunnels unlimited number of VLAN interfaces up to 200 active hotspot users up to 20 active MikroTik Usermanager sessions

- CPU nominal frequency: 650 MHz
- CPU core count: 1

- Size of RAM: 64 MB
- 10/100 Ethernet ports: 5
- Wireless: Built-in 2.4 GHz 802.11b/g/n, dual-chain
- Antenna gain: 1.5 dBi
- Antenna beam width: 360°
- Wireless chip model: QCA9531-BL3A-R
- PoE in: Yes
- PoE out: Yes (Ether5)
- Supported input voltage: 6 - 30 V (Jack or Passive PoE)
- Extras: USB 2.0 Type A full size port, 1A
- Dimensions: 113 x 89 x 28mm
- License level: 4
- Operating System: RouterOS
- CPU: QCA9531-BL3A-R
- Max. power consumption: 5 W

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	0.30	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.30	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.30	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	1.75

More images:



EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

SIA Mikrotīkls

Ūnijas iela 2

Rīga, Latvia

<https://mikrotik.com>

support@mikrotik.com