


# DIGITUS® Fiber Optic Patchcord, MPO, Female, OS2, Method A, 10m

DK-2966-10

EAN 4016032345190

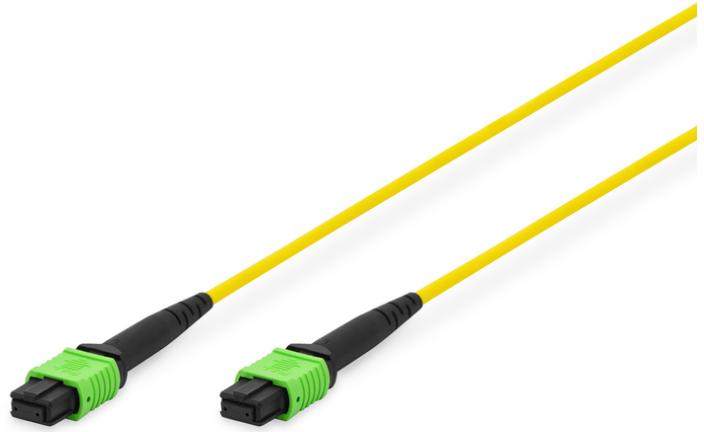

### Fiber Optic Patchcord, MPO to MPO, Female OS2, Singlemode 09/125 μ, 10m, Method A, yellow/green

The MPO patch cable allows data rates of 40Gb/s or 100Gb/s and is the answer of the needed growing bandwidths of datacenters. The standardized IEC61754-7 and TIA/EIA 604-5 MPO Plug guaranteed the best performance in the whole network and is hardly larger than a standard RJ45 plug. The excellent damping and the compact design makes this patch cable to the first choice, if we talk about bandwidth and performance.

#### High-performance solutions designed for efficient and scalable connectivity in data centers.

- Connector: MPO female
- Polish : APC
- Type : Method A
- Fibre type : SM-G652D, 9/125μ, OS2
- Fiber Count : 12
- Cable outer diameter : 3 mm
- Sheath colour : Yellow

- Cable length : 10 m
- Outer sheath material : LSZH
- Max. Tensile strength : 300 N
- Min. bending radius : 30 mm
- Temperature range : -40°C till +75°C

#### Attributes

- Cable diameter: 3 mm
- Cable jacket: LSOH
- Color cable: yellow
- Fiber class: OS2
- Fiber diameter: 9/125μ
- Mode: Singlemode
- Number of connectors side 1: 1
- Number of connectors side 2: 1
- Number of fibers: 12
- Length: 10 m

#### Package contents

- 1 x Fiber Optic Patchcord, MPO, Female, OS2, Method A, 10m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	130	10.90	40.00	40.00	30.00	48,000.00
Packaging Unit Inside	1	0.08	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.08	14.00	0.00	20.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00