
DIGITUS® Fiber Optic Patchcord, MPO, Female, OS2, Method A, 10m

DK-2966-10

EAN 4016032345190

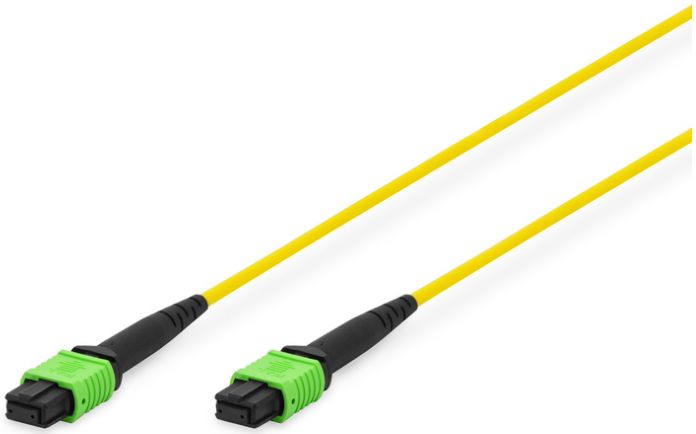

Fiber Optic Patchcord, MPO to MPO, Female OS2, Singlemode 09/125 µ,10m,Method A,yellow/green

The MPO patch cable allows datarates of 40Gb/s or 100Gb/s and is the answer of the needed growing bandwidths of datacenters. The standardized IEC61754-7 and TIA/EIA 604-5 MPO Plug guaranteed the best performance in the whole network and is hardly larger than an standard RJ45 plug. The excellent damping and the compact design makes this patch cable to the first choice, if we talk about bandwidth and performance.

High-performance solutions designed for efficient and scalable connectivity in data centers.

- Connector: MPO female
- Polish : APC
- Type : Method A
- Fibre type : SM-G652D, 9/125µ, OS2
- Fiber Count : 12
- Cable outer diameter : 3 mm
- Sheath colour : Yellow
- Cable length : 10 m
- Outer sheath material : LSZH
- Max. Tensile strength : 300 N
- Min. bending radius : 30 mm
- Temperature range : -40°C till +75°C

Attributes

- Cable diameter: 3 mm
- Cable jacket: LSOH
- Color cable: yellow
- Fiber class: OS2
- Fiber diameter: 9/125µ
- Mode: Singlemode
- Number of connectors side 1: 1
- Number of connectors side 2: 1
- Number of fibers: 12
- Length: 10 m

Package contents

- 1 x Fiber Optic Patchcord, MPO, Female, OS2, Method A, 10m

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	130	10.90	40.00	40.00	30.00	48,000.00
Packaging Unit Inside	1	0.08	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.08	14.00	0.00	20.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.