


DIGITUS CAT 6 S/FTP patch cord, 10 units

DK-1644-030-G-10
EAN 4016032441939

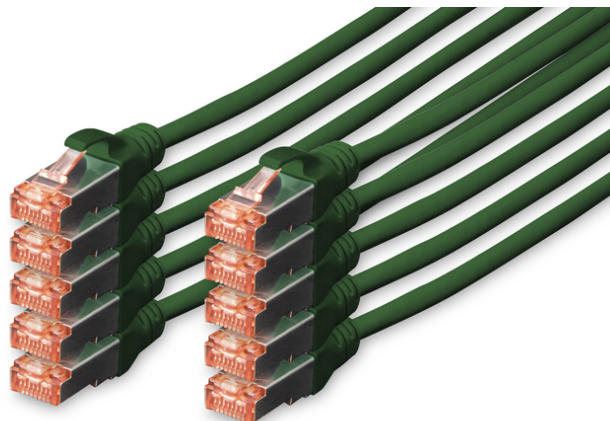

CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 3 m, 10 pieces, color green

The DIGITUS® Category 6 Class E patch cords are manufactured and tested to the ISO/IEC 11801 and DIN EN 50173 Category 6 specifications. They will guarantee the installed cabling system is compliant with the ISO & EN channel specification requirements and will provide optimum performance levels of DIGITUS® Category 6 cabling. The performance is tested up to 250 MHz inclusive performance characteristics such as near end cross talk ("NEXT"). DIGITUS® patch cords are designed and produced to fulfill the highest requirements of various application areas in full volume. Each cable is fitted with a molded boot which comes with kink protection and strain relief. Furthermore the boot is equipped with a latch protection that prevents the latching lever against breaking. You can easily identify the Category 6, because of the transparent red colored connector.

CAT 6 S/FTP patch cord, 10 units

- 2x RJ45 (8P8C) connectors
- Boots with kink protection, strain relief and latch protection
- Length marking on boot
- Conductor: Copper (Cu)
- 10 pieces
- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: DIGITUS Polybag
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 3 m
- Color: green
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair

Logistics

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------|
| Packaging Unit Carton | 8 | 0.85 | 36.00 | 36.00 | 30.00 | 38,880.00 |
| Packaging Unit Inside | 1 | 0.10 | 15.40 | 30.00 | 36.00 | 16,632.00 |
| Packaging Unit Single | 1 | 0.10 | 1.60 | 17.00 | 25.00 | 680.00 |
| Net single without Packaging | 0 | 0.09 | 300.00 | 1.17 | 1.27 | 445.77 |

More images:

