

# DIGITUS All-in-One UPS, 800VA/480W, LED

DN-170111

EAN 4016032456582



## All-in-One UPS, 800VA/480W, LED 12V/9Ah x1, 4x CEE 7/7, 3x IEC C13, USB, RJ45

The line interactive UPS models offer protection against power failure, surge damages, data loss and much more. The line interactive series stands out for its user-friendly operation, advanced performance level and security through an integrated microprocessor control unit. Protect yourself against data loss and damage to your home and office devices. Preserve your devices with the AVR function that always automatically provides the right voltage and prevents overvoltage and undervoltage. This UPS series is topped off with extra security features, overload protection, discharge protection and overcharge protection as well as a cold start function and energy saving function. With the USV system, data loss and damages are a thing of the past.

### All-in-one: Reliable protection from data loss and power failure, surge damages to your connected devices

- 4x shockproof sockets to connect your devices
- 3x IEC C13 sockets to connect monitors, for example
- 1x USB Type-A socket to charge mobile devices with 5V/2A max.
- 1x USB Type-B socket for software communication
- 1x RJ45 input / output for surge protection for your Internet access + software communication
- LED indicator for the following functions: Supply via mains voltage / supply via battery voltage / error message
- Acoustic error message for the following events: Power failure (10 sec.) / Weak battery (1 sec.) / Overload (0.5 sec.) / Error (continuous tone)
- Protection functions: Discharge / overcharge / overload


- Changeover time if power fails: 2 – 6 ms
- Automatic restart while voltage is restored
- Software for controlling and monitoring connected devices / UPS functions
- Capacity: 800 VA / 480 W
- Input voltage: 220 – 240 V/AC
- Input voltage tolerance: 162 – 290 V/AC
- Output voltage regulation: +/- 10%
- Frequency range: 50 to 60 Hz (+/- 10%)
- Waveform: Simulated sine wave
- Battery type: 12 V / 9 Ah 1x
- Charging Time: 6 – 8 hours (0 – 90% charge)
- Noise level: <40 dB
- USB charging socket type A: 5V/2A max.
- Operation temperature: 0 ~ 40°C
- Operating humidity: 0 – 90 % (non-condensing)
- Dimensions (L x W x H): 9 x 20,2 x 28,5cm
- Weight: 5.2 kg
- Installation: Desktop
- Plug: IEC 60320 C14 inlet
- Plug: IEC 60320 C14 inlet
- Power: 600VA – 1000VA
- Technology: Line-interactive

### Package contents

- 1x All-in-one UPS, 800 VA / 480 W
- 1x power plug
- 1x manual

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	4	23.70	44.10	36.50	30.00	48,289.50
Packaging Unit Inside	1	5.92	0.00	0.00	0.00	0.00
Packaging Unit Single	1	5.92	36.00	14.50	18.00	9,396.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

More images:

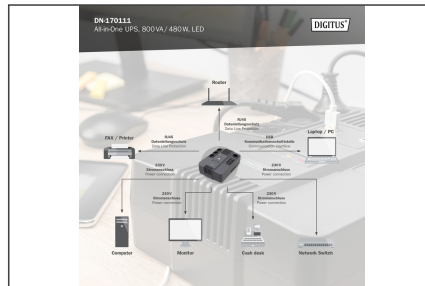

DN-170111  
All-in-One UPS, 800VA / 480W, LED

Electromagnetic  
Interference

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class

EMC Class