


DIGITUS CAT 6 U/UTP patch cord - LSZH

DK-1617-025 EAN 4016032468073



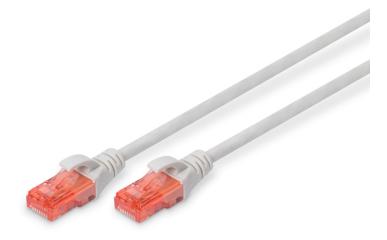

CAT 6 U-UTP patch cord, Cu, LSZH AWG 26/7, length 2.5 m, color grey $% \left({{\rm{S}}_{\rm{T}}} \right) = {\rm{C}}_{\rm{T}} \left({{\rm{C}}_{\rm{T}}} \right) = {\rm{C}}_{\rm{T}$

The DIGITUS® Category 6 Class E patch cords are manufactured and tested to the ISO/IEC 11801 and DIN EN 50173 Category 6 specifications. They will guarantee the installed cabling system is compliant with the ISO & EN channel specification requirements and will provide optimum performance levels of DIGITUS® Category 6 cabling. The performance is tested up to 250 MHz inclusive performance characteristics such as near end cross talk ("NEXT"). DIGITUS® patch cords are designed and produced to fulfill the highest requirements of various application areas in full volume. Each cable is fitted with a molded boot which comes with kink protection and strain relief. Furthermore the boot is equipped with a latch protection that prevents the latching lever against breaking. You can easily identify

the Category 6, because of the transparent red colored connector.

Future-oriented standards and high-end quality for your network.

- 2x RJ45 (8P8C) connectors
- Boots with kink protection, strain relief and latch protection

1

- Length marking on boot
- Conductor: Copper (Cu)
- Configuration: 1:1
- Category: CAT 6
- Shielding: U-UTP, unshielded
- Color: greyJacket: LSOH
- Jacket: LSOH
 Slim Version: no
- Structure: 4 x 2 AWG 26/7, twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	130	9.25	36.00	36.00	27.00	34,992.00
Packaging Unit Inside	10	0.71	42.00	25.00	12.00	12,600.00
Packaging Unit Single	1	0.07	27.00	17.00	1.50	688.50
Net single without Packaging	0	0.07	1.00	250.00	1.50	375.00

More images:

