

DIGITUS® SOHO Pro wall-mounted enclosure - 254 mm (10") - 315x300 mm (WxD)

DN-49101

EAN 4016032493631



10" 6U wall mounting cabinet, SOHO Pro 325 x 315 x 300 mm, unmounted, black

Whether in the home, office or in sub-distribution boards with limited space: With the compact 254 mm (10") solutions from the SOHO Pro series, you can install your network wherever you want. Available in three height units (6U, 9U, 12U), the wall-mounted enclosures are equipped with a full glass door and a cable entry in the top and bottom. A pair of galvanized 254 mm (10") profile rails labelled with legible height units are installed inside. These can be adjusted in depth. Each cabinet is a robust steel construction made of up to 1.5 mm thick sheet steel. The coloring takes the form of electrostatic powder coating in the standard colors grey (RAL 7035) and black (RAL 9005). The door hinges can be changed. The network enclosures are supplied unassembled in an optimized flat pack. Assembly takes place in just a few steps and is child's play thanks to the enclosed step-by-step instructions.

The DIGITUS® wall-mounted enclosure SOHO Pro series is characterized by efficient delivery in an optimized flat pack and particularly user-friendly installation.

- Protection class IP20
- Lockable safety glass door, type 9473
- 200° door opening angle
- 1-point locking on the front door
- 254 mm (10") profile rails mounted at the front inside the enclosure, galvanized

- 254 mm (10") profile rails are adjustable in depth
- 1.1 - 1.5 thick sheet steel with a high load-bearing capacity, powder-coated
- Cable entry with brush strip in the roof and with plastic cover in the floor
- Ventilation slots for active and passive ventilation
- Installation depth for components max.: 254 mm
- Product dimensions (H x W x D): 325 x 315 x 300mm
- Packaging dimensions (H x W x D): 175 x 360 x 340 mm
- Weight (net / gross): 5.01 / 5.25 kg

Attributes


- Cabinet type: Wall mounting cabinet
- Color: black, RAL 9005
- Depth: 300 mm
- Front door: Glass door, single opening
- Load capacity: 30 kg
- Side panels: Both sides
- Units: 6
- Width: 316 mm
- IP protection class: IP20
- Mounted: no

Package contents

- 2x key
- 1x QIG

Logistics							
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³	
Packaging Unit Carton	1	5.25	34.00	36.00	17.50	21,420.00	
Packaging Unit Inside	1	5.25	34.00	36.00	17.50	21,420.00	
Packaging Unit Single	1	5.25	34.00	36.00	17.50	21,420.00	
Net single without Packaging	0	5.01	30.00	31.50	32.50	0.00	

More images:

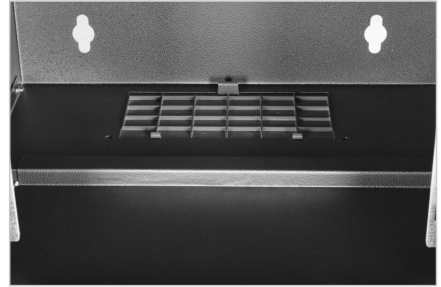

DN-45101
Wall Mounting Cabinet S010 PRO
254mm (10") x 315 x 300mm (WxD)

DIGITUS

Slide the lock panel into the hole in the center of the cabinet. The arrow on the lock panel indicates the correct direction of the lock panel. Push the lock panel into the hole to the end of the hole.

Assemble the lock panel to the hole by 2 screws.

Put the cabinet on the floor, the bottom panel facing the ground. Mark the positions of the cabinet panel dimensions and the positions of the top panel screws.

Show the QR code your camera to read the installation video. The QR code is located on the back of the cabinet.

DN-45101
Wall Mounting Cabinet S010 PRO
254mm (10") x 315 x 300mm (WxD)

DIGITUS

- Take the 10" plate cabinet out of the box.
- Use the top panel of the cabinet as the top panel of the cabinet. Open the top panel of the cabinet.
- Slide the top panel into the hole in the center of the cabinet. The arrow on the top panel indicates the correct direction of the top panel. Push the top panel into the hole to the end of the hole.
- Insert the top panel of the cabinet into the hole of the top panel.