

DIGITUS® Wall-mounted enclosure SOHO Pro - 254 mm (10") - 315x300 mm (WxD)

DN-49102

EAN 4016032493648



10" 9U wall mounting cabinet, SOHO Pro 460 x 315 x 300 mm, unmounted, grey

Whether in the home, office or in sub-distribution boards with limited space: With the compact 254 mm (10") solutions from the SOHO Pro series, you can install your network wherever you want. Available in three height units (6U, 9U, 12U), the wall-mounted enclosures are equipped with a full glass door and a cable entry in the top and bottom. A pair of galvanized 254 mm (10") profile rails labelled with legible height units are installed inside. These can be adjusted in depth. Each cabinet is a robust steel construction made of up to 1.5 mm thick sheet steel. The coloring takes the form of electrostatic powder coating in the standard colors grey (RAL 7035) and black (RAL 9005). The door hinges can be changed. The network enclosures are supplied unassembled in an optimized flat pack. Assembly takes place in just a few steps and is child's play thanks to the enclosed step-by-step instructions.

The DIGITUS® wall-mounted enclosure SOHO Pro series is characterized by efficient delivery in an optimized flat pack and particularly user-friendly installation.

- Protection class IP20
- Lockable safety glass door, type 9473
- 200° door opening angle
- 1-point locking on the front door
- 254 mm (10") profile rails mounted on the front inside the enclosure, galvanized

- 254 mm (10") profile rails are adjustable in depth
- 1.1 - 1.5 thick sheet steel with a high load-bearing capacity, powder-coated
- Cable entry with brush strip in the roof and with plastic cover in the floor
- Ventilation slots for active and passive ventilation
- Installation depth for components max.: 254 mm
- Product dimensions (H x W x D): 460 x 315 x 300 mm
- Packaging dimensions (H x W x D): 175 x 360 x 475 mm
- Weight (net / gross): 6.44 / 7.04 kg

Attributes


- Cabinet type: Wall mounting cabinet
- Color: light grey, RAL 7035
- Depth: 300 mm
- Front door: Glass door, single opening
- Load capacity: 30 kg
- Side panels: Both sides
- Units: 9
- Width: 316 mm
- IP protection class: IP20
- Mounted: no

Package contents

- 2x key
- 1x QIG

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	7.04	47.50	36.00	17.50	29,925.00
Packaging Unit Inside	1	7.04	47.50	36.00	17.50	29,925.00
Packaging Unit Single	1	7.04	47.50	36.00	17.50	29,925.00
Net single without Packaging	0	6.44	30.00	31.50	46.00	0.00

More images:

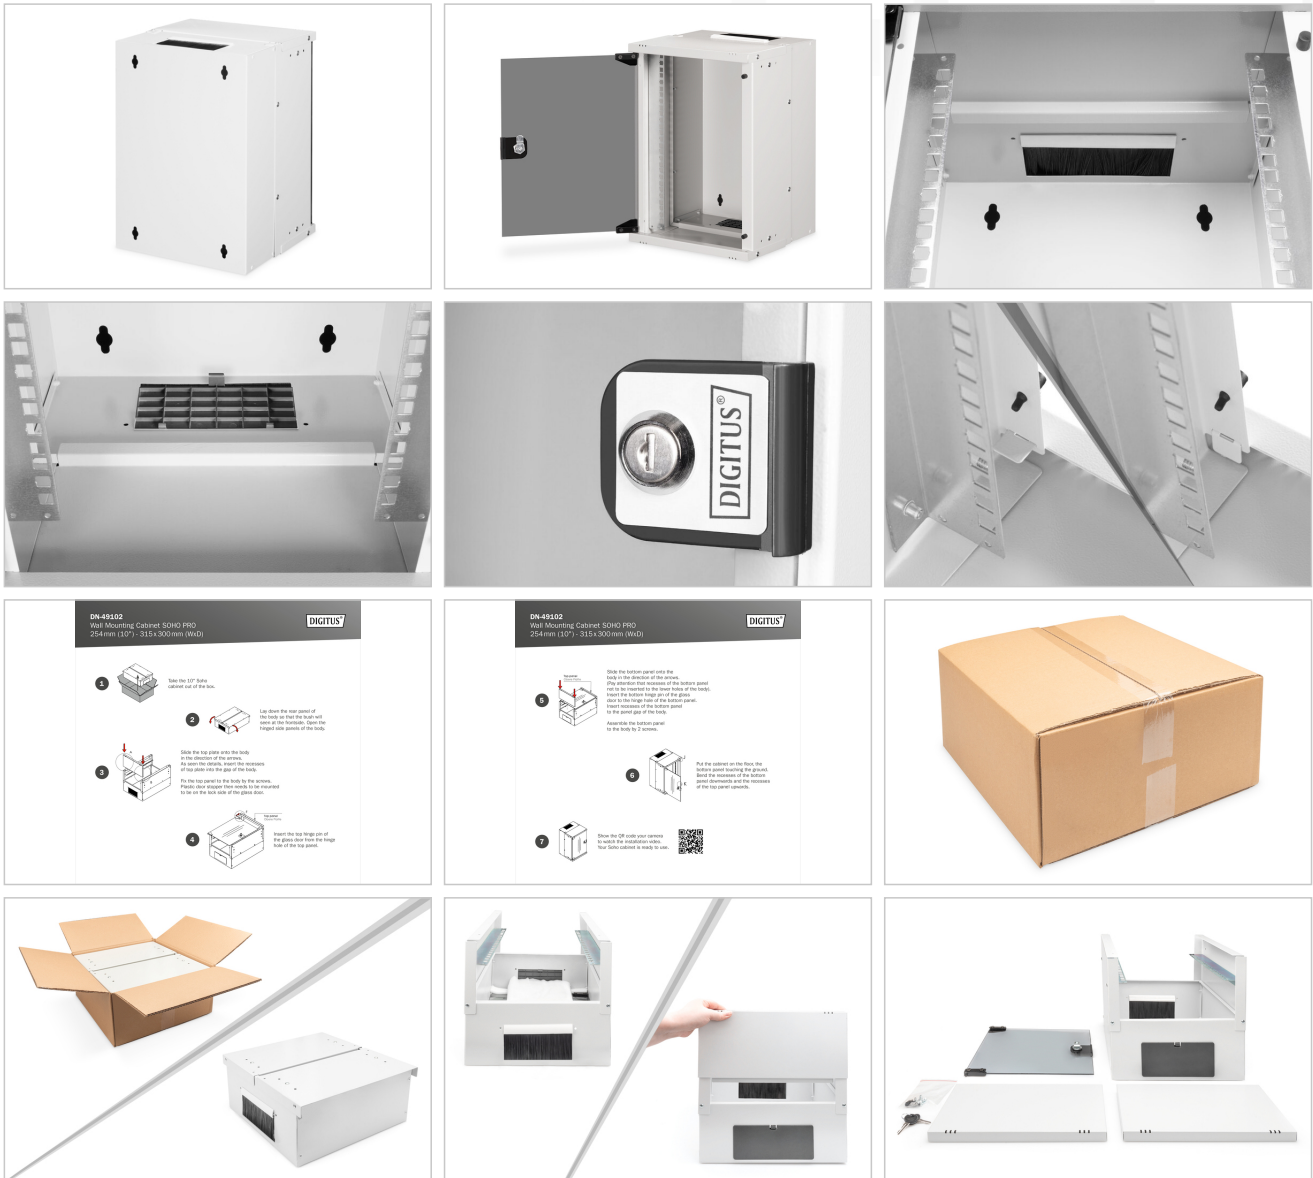

DH-8802
Wall Mounting Cabinet SOHO PRO
254mm (10") - 315x300mm (WxD)

DIGITUS

1. Lay the top plate on a flat surface and lay out all of the bolts.
2. Lay down the rear panel of the body so that the wall-mounting holes align with the pre-drilled holes in the rear panel. Open the finger lock panels of the body.
3. Slide the top plate into the body in the direction of the arrows. As soon as the cables, insert the rear panel of the plate into the plate of the body. Fit the top panel to the body by the arrows. Finger lock supports have already been mounted to be on the back side of the glass door.
4. Insert the top large pin of the glass door into the finger lock of the top panel.

DH-8802
Wall Mounting Cabinet SOHO PRO
254mm (10") - 315x300mm (WxD)

DIGITUS

1. Slide the bottom cover into the body in the direction of the arrows. Pay attention that the excess of the bottom panel may be inserted into the front panel of the body. Align the bottom cover with the glass door to the large hole of the bottom cover. Insert the bottom cover into the panel joint of the body.
2. Assemble the bottom panel to the body by 2 screws.
3. Put the cabinet on the floor, the bottom panel facing the ground. Press the bottom panel downwards and the rear panel of the cabinet upwards.
4. Turn the QR code your camera to check the installation code. Your SOHO cabinet is ready to use.

