


DIGITUS® CAT 6A F-FTP Slim patch cord, 3m, yellow

DK-1632-A-030S-Y
EAN 4016032498131

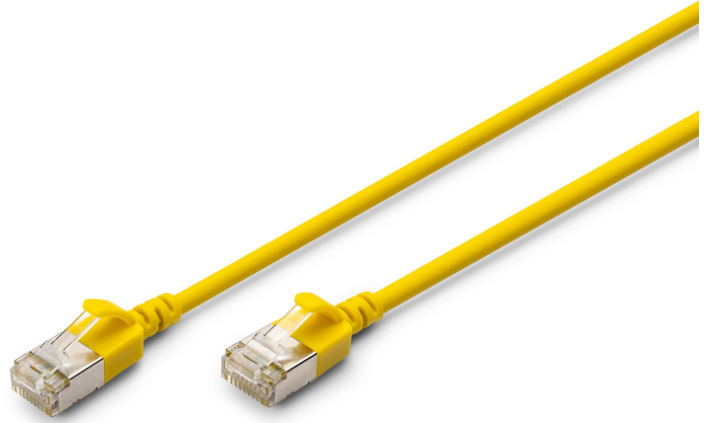

CAT 6A F-FTP Slim Patch cord, Cu, LSZH AWG 32/7, length 3m, Yellow

DIGITUS® Slim patch cables are characterized by their small outer diameter and flexible jacket. The slim design enables versatile use in your network. In addition, DIGITUS® Slim patch cables are manufactured in accordance with the ISO/IEC 11801 and DIN EN 50173 CAT 6A standards. They guarantee that the cable installation complies with the ISO & EN channel specification and offer excellent performance in DIGITUS® CAT 6A cabling. Performance has been tested up to 500 MHz, including features such as near-end crosstalk ("NEXT"). DIGITUS® patch cables have been specially developed to meet all requirements in various application areas. Each cable is equipped with a molded anti-kink sleeve with strain relief. In addition, the sleeve has a locking lever protection that prevents the cable from kinking and the locking lever from breaking off the plug.

Future-oriented standards and high-end quality for your network.

- Outer casing: LSZH (Low Smoke Zero Halogen)
- Total diameter: 3.8 mm ± 0.15 mm
- Conductor stranded: AWG 32/7 bare copper, 0.12 ± 0.005 mm
- Insulation: HD-PE (high-density polyethylene)
- Bending radius: 15x OD
- Plug: RJ45 plug
- Color code: Orange x white, green x white, blue x white, brown x white


- Wiring standard: EIA/TIA 568B
- PIN assignment: 1:1
- Contact resistance: 376.96mΩ/km maximum at 20 °C
- Imbalance of the resistance: maximum 3%
- Operating temperature: -20 °C up to +60 °
- Flame retardancy: IEC 60332-1
- Smoke emission: IEC 61034
- Typical applications: IEEE 802.3: 10BASE-T; 100BASE-T; 1000BASE-T
- Standards: ISO/IEC 11801-1; EN-50173; ANSI/TIA 568-C; EN 60603-7-4
- Dielectric strength: AC 500V for 1 minute without breakdown (TIA/EIA-364-21)
- Service life: 750 mating cycles
- Packaging: DIGITUS Polybag

Attributes

- Category: CAT 6A
- Shielding: F-FTP – foil shielding and pairs in metal foil
- Length: 3 m
- Color: yellow
- Slim Version: yes
- Flat Version: no

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 200 | 10.50 | 30.00 | 30.00 | 46.00 | 41,400.00 |
| Packaging Unit Inside | 10 | 525.00 | 6.00 | 20.00 | 23.00 | 2,760.00 |
| Packaging Unit Single | 1 | 0.05 | 1.00 | 16.00 | 20.00 | 320.00 |
| Net single without Packaging | 0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

More images:

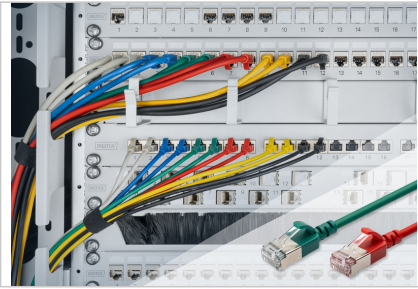

Compact Connectors
ideal for usage in confined spaces

Standard Patch Cable Slim Patch Cable

Standard Patch Cable: 38.3 mm width, 21.0 mm height
Slim Patch Cable: 34.3 mm width, 12.7 mm height


DIGITUS

Slim and flexible design
to save space in confined areas

3 m Standard Patch Cable 3 m Slim Patch Cable

Standard Patch Cable: Ø 5.7 mm
Slim Patch Cable: Ø 3.8 mm

DIGITUS

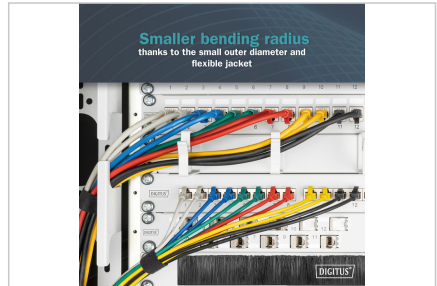

Nearly half as thick

Perfect for cable management in high density solutions

DIGITUS

CAT6_A F/FTP Slim Patch Cord
Especially developed to meet all requirements in various application areas

- CAT 6_A 250 MHz Compatibility
- 10 Gbps Data Transmission
- AWG 23/27 Wire Gauge
- PoE+ Charging Delivery
- Low Smoke Zero Halogen

DIGITUS