


# DIGITUS® Modular plugs for flat cable

A-MO 6/6 SF

EAN 4016032065135

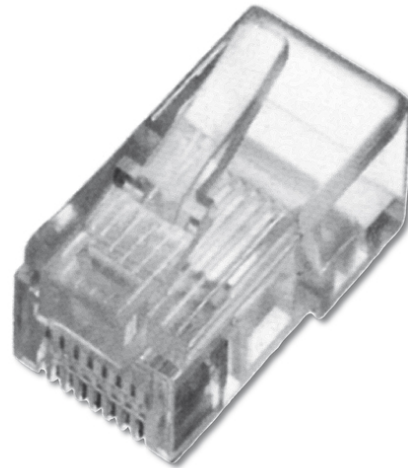

### Modular Plug, for Flat Cable, 6P6C unshielded, DIP, 6 µ gold

These modular plugs can be used to establish quick and simple connections.

- Layout performance: CAT 3, 1GBase-T
- Area of application: Patch cable assembly
- Norms: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:
- UL certified
- Technical properties:

- Mating cycles female: > 750 acc. to ISO/IEC 11801, IEC 60603-7-5
- Material connector body: Polycarbonat, clear
- Connector contact: Phosphor bronze, brass 0.6 µ gold-plated
- Flammability: UL 94V-2
- Physical properties:
- Insertion force: 20N
- Diameter Cu-Conductor: AWG (27/7 ... 24/7)
- Operating temperature: -40 °C to +80 °C
- Current carrying capacity: 1A -1.5A at 50 °C

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	9.70	41.50	29.00	22.00	26.48
Packaging Unit Inside	100	0.10	2.00	15.00	20.00	600.00
Packaging Unit Single	100	0.10	2.00	15.00	20.00	600.00
Net single without Packaging	0	0.00	1.50	1.00	1.00	1.50

### Safety notes

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)