

# DIGITUS® Multiple socket outlet with aluminum profile and overload protection, 12-way socket outlet with earthing contact, 2 x 2 m supply cable with earthing contact plug

DN-95405

EAN 4016032266433



### Aluminum PDU, rackmountable, 12x safety outlet 2x 16A, 250VAC 50/60Hz, overload protection

The DIGITUS® power strips are the perfect solution for your network or server cabinet. In terms of power distribution, the PDU meets the requirements of many applications in IT, network technology, laboratories and the home. The power strip can be mounted vertically in the cabinet. The PDU has 2 separate supply lines. An integrated overload protection per power feed protects the connected consumers from overload. Depending on the type of cabinet, it is possible to mount the socket strip with the taps pointing to the right or left.

#### Safe and professional power supply with overload protection and 2 power feeds.

- 2 independent feeds
- Overload protection per infeed, interruption capacity: 1000 A
- Vertical installation
- Rotation of the cans: 45°
- Housing: Aluminum
- Plastic components made of ABS UL-94V-0

- Input: 2 x safety plug CEE 7/7, 230 Vac / 16 A
- Output: 2 independent groups, each with 6 x DIN 49440 socket outlet with earthing contact, max. 16 A per output
- Supply line: 2 feeds, 2 x cable cross-section: 1.5 mm<sup>2</sup>, length: 2 m
- Rated voltage: 230-250 VAC, 50/60 Hz
- Dimensions: 767.6 x 45 x 45 mm (HxWxD)

#### Attributes




- Current: 16 A
- Input Plug: CEE7/7
- Installation: Rack OU
- Outlets: CEE 7/3
- Phase: 1ph
- Power: 7,3 kVA
- Volts: 230 V

#### Package contents

- Scope of delivery: 1 socket strip, 2 mounting brackets; 1 safety instructions

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 10           | 23.15       | 95.00      | 24.50      | 42.00       | 97.76           |
| Packaging Unit Inside        | 1            | 2.32        | 9.30       | 80.00      | 7.00        | 5.21            |
| Packaging Unit Single        | 1            | 2.32        | 9.30       | 80.00      | 7.00        | 5.21            |
| Net single without Packaging | 0            | 1.41        | 4.50       | 75.80      | 4.50        | 1,534.95        |

More images:

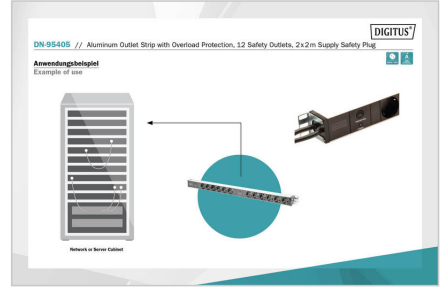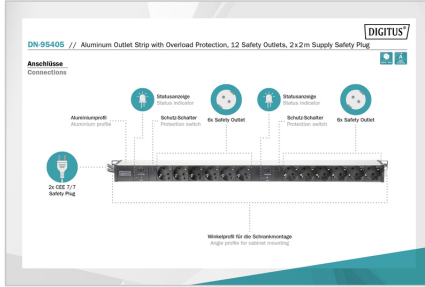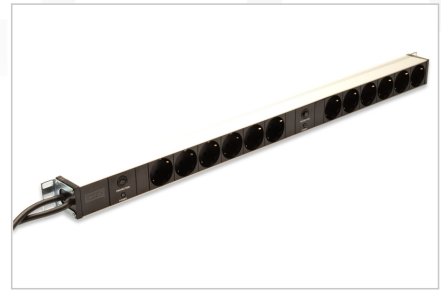

**Safety notes**

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schöffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)