# DIGITUS® Fiber Optic Splice Box, Equipped, SC, OS2

**DN-96321/9**

**EAN 4016032278368**



**FO splice box, 1U, equipped, 12x SC DX, OS2 incl. splice cassette, colored pigtails, couplers**

FO splice box, 1U, equipped, 12x SC DX, OS2,incl. splice cassette, colored pigtails, couplers

- Completely prefabricated, fiber pigtails exposed and inserted into the splice cassette(s), crimp splice holders
- Colored pigtails
- Couplers with ceramic sleeve
- Couplers in polymer housing
- Carrier housing made of 1.0 mm steel sheet, varnished
- 1 height unit (44.45 mm)
- 483mm width (19")
- 280mm depth
- M20/M25 screw, cassette, cassette cover and strain relief included
- Sliding

**Attributes**

- Assembly: Splice Box
- Color: light grey, RAL 7035
- Connector type: SC / UPC / duplex
- Fiber class: OS2
- Number of fibers: 24
- Type: sliding

**Logistics**




| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 5 | 15.30 | 51.50 | 31.50 | 5.50 | 8,922.38 |
| **Packaging Unit Inside** | 1 | 3.06 | 51.50 | 31.50 | 5.50 | 8,922.38 |
| **Packaging Unit Single** | 1 | 3.06 | 51.50 | 31.50 | 5.50 | 8,922.38 |
| **Net single without Packaging** | 0 | 3.01 | 43.30 | 24.30 | 3.50 | 3,682.67 |

**More images:**





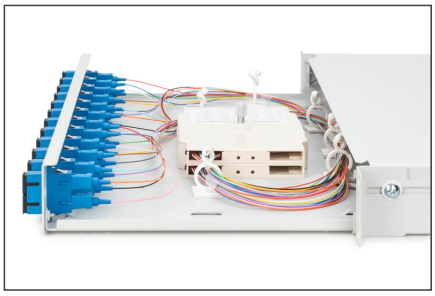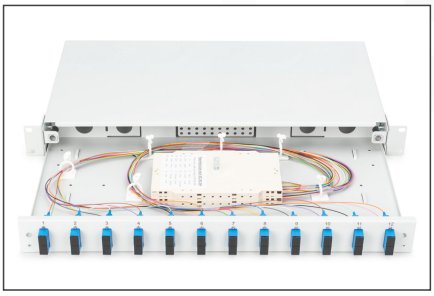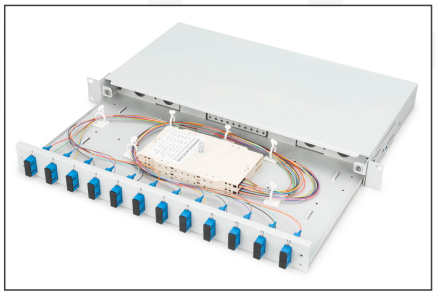

**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com