

DIGITUS DVI extender over Cat.5 / Cat.6

DS-54101

EAN 4016032285694



DVI Video Extender over Cat5 up to 70m (CAT5, UTP)

The DVI Cat.5 / Cat.6 extender extends your PC DVI transmission distance up to 70 meters through a simple Cat5 cable. The possible resolutions depend on the extended distance.

Extension of DVI signal up to 70 meter

- DVI-D extension over Cat.5 / Cat.6 cable
- Supports max. resolution up to 1920x1200 pixels at a distance of 50m
- Supports max. distance up to 70m at a resolution of 800x600 pixels

- No external power supply needed


Attributes

- HDTV rezolucija maks.: 1920 x 1200 piksela, 60 Hz
- HDTV-norma: Full HD
- Kategorija: CAT 5e
- KVM: Ne
- PoE (napajanje preko Ethernet): Ne
- Razmak: 50 m
- Tehnologija prijenosa: CAT

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	100	10.80	33.50	37.00	27.50	34,086.20
Packaging Unit Inside	1	0.11	4.90	8.60	6.30	265.48
Packaging Unit Single	1	0.11	5.00	8.50	6.00	255.00
Net single without Packaging	0	0.03	5.55	4.02	2.25	50.20

More images:

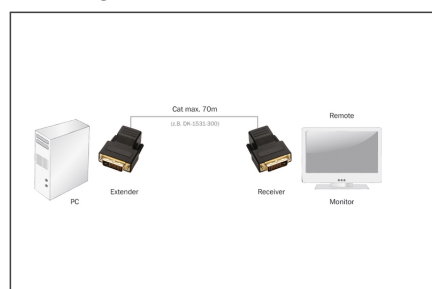

VIDEO VERLÄNGERUNGEN VIDEO EXTENSIONS		M = Meter / meters
HDMI		
DS-50900 1 m RESOLUTION	100 M	
DS-50901	100 M	
DS-50900	100 M	
DS-50400 (HDMI-EXTENSION)	100 M	
DS-50300 (HDMI)	100 M	
DS-50100	100 M	
VGA		
DS-50900 1 m RESOLUTION	100 M	
DS-50901	100 M	
DS-50900	100 M	
DS-50400 (HDMI-EXTENSION)	100 M	
DS-50300 (HDMI)	100 M	
DS-50100	100 M	
DVI		
DS-54001	100 M	
DS-54101	100 M	

Safety notes

- If the device is powered by a plug-in power supply, ensure that the power adapter is connected correctly and meets the specified requirements (e.g. voltage and current).
- Only use certified CAT5e or CAT6 cables to ensure stable signal transmission.

- For particularly long cable runs or in environments prone to interference, it is recommended to use shielded network cables.
- Make sure that all connections are tight and secure to avoid loose contacts that could affect the signal quality. Make sure that the HDMI and Ethernet connections are connected correctly.
- Make sure that the CAT cable is not laid near high-voltage power lines or other strong sources of electromagnetic interference to avoid signal interference.
- Only operate the device within the specified temperature range.
- Do not use the device outdoors or in damp or wet environments
- Check all connections and cables regularly for wear or damage. Cables and connections can wear out, especially with frequent use or long installations, which can lead to poor signal quality or system failure.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com