

# DIGITUS® DisplayPort Connection Cable, 5m

AK-340100-050-S  
EAN 4016032288978



## DisplayPort Connection Cable, Type DP M/M, 5.0m, w/interlock,Ultra HD 1080P, DP 1.1, bl

This high performance HD digital audio and video cable for example is used to connect a PC or notebook with DisplayPort interface to a monitor with DisplayPort interface.

**Ideal for CAD/CAM, GIS, 3D modeling, real time simulation, and more.**

- Support 1080p
- Max. supported Video Resolution: 1080 p
- Supported transmission modes: RBR, HBR
- Maximal bandwidth: 10,2 Gbps
- HBR-Version/transfer mode: HBR (2,70 Gbit/s per lane)
- HDCP-Version: HDCP 1.3



### Attributes

- Ambalaža: Polybag

- Asortiman: DisplayPort kabele
- AWG: 30
- Blokiranje: Zatvarač na kopču
- DisplayPort standard: DisplayPort 1.1a
- Feritni filter: nema
- HDTV-norma: 1080p
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: DP, utikač
- Konektor 2: DP, utikač
- Konektor u boji: crni
- Materijal žice: CCS
- Površina konektora: poniklano
- Duljina: 5 m
- AOC - aktivni optički kabel: Ne
- oklop: trostruki oklop

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	30	7.88	51.00	34.00	21.00	36.41
Packaging Unit Inside	5	1.31	6.00	32.00	33.00	6.34
Packaging Unit Single	1	0.26	20.00	19.00	4.50	1.71
Net single without Packaging	0	0.22	17.00	16.50	4.00	1.12

**More images:**

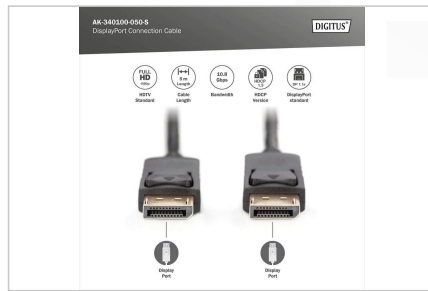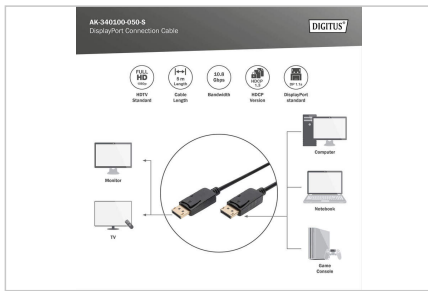

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)