

# DIGITUS® DisplayPort Adapter / Converter

AK-340403-001-S

EAN 4016032289289



**DisplayPort Adapter Cable, Type DP - HD15 M/F, 0.15m,w/interlock, DP 1.2, bl**

This adapter / converter suits for example ideal to connect a notebook or computer with DP interface to a VGA monitor, beamer, LCD/TFT monitor with a VGA monitor cable.

**Use your existing VGA monitor with a DisplayPort device without loss of quality**

- Supports up to 1080p with 60Hz
- Supports monitor resolutions of up to 1920 x 1200p
- Supported transmission modes: RBR, HBR, HBR2
- Maximal bandwidth: 21,6 Gbps
- HBR-Version/transfer mode: HBR2 (5,40 Gbit/s per lane)
- HDCP-Version: HDCP 1.3


**Attributes**

- Ambalaža: Polybag

- Asortiman: DisplayPort kabele
- AWG: 28
- Blokiranje: Zatvarač na kopču
- DisplayPort standard: DisplayPort 1.2
- Feritni filter: nema
- HDTV-norma: Ultra HD 4K
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: DP, utikač
- Konektor 2: HD15, priključak
- Konektor u boji: crni
- Materijal žice: CU
- Površina konektora: poniklano
- Duljina: 0.15 m
- AOC - aktivni optički kabel: Ne
- oklop: dvostruki oklop

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	200	8.00	38.10	30.20	31.10	35,784.30
Packaging Unit Inside	10	0.40	40.60	40.60	8.10	13,351.70
Packaging Unit Single	1	0.04	20.00	15.00	1.62	486.00
Net single without Packaging	0	0.03	24.50	4.50	1.50	165.38

**More images:**

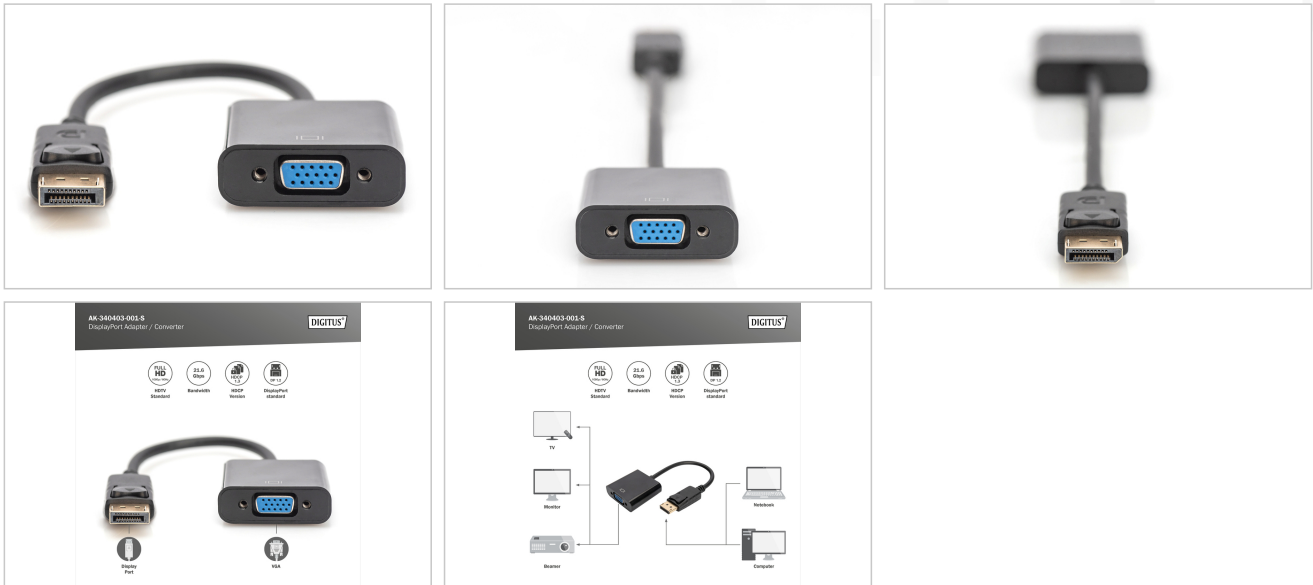

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)