

# DIGITUS® DisplayPort adapter cable, mini DP - DP

DB-340405-001-W  
EAN 4016032292432



## DisplayPort Adapter Cable, Type mini DP-DP St/Bu, 0.15m, UHD 4K, DP 1.2 konform, we

This digital HD video and audio cable is ideally suited for connecting a MacBook®, MacBook Air®, MacBook Pro®, iMac®, Mac mini® and Mac Pro® to a DP monitor or projector, LCD-TFT monitor using a DisplayPort cable. The DIGITUS® cable is compatible with DisplayPort version 1.2 and supports resolutions of up to UHD 4 K/60 Hz.

### Use mini DisplayPort devices on standard DisplayPort connections

- Supports resolutions up to UHD 4K/60Hz
- Maximal bandwidth: 21,6 Gbps
- HBR-Version/transfer mode: HBR2 (5,40 Gbit/s per lane)
- HDCP-Version: HDCP 1.3


### Attributes

- AWG: 32
- Blokiranje: nema
- DisplayPort standard: DisplayPort 1.2
- Feritni filter: nema
- HDTV-norma: Ultra HD 4K
- Kabel u boji: bijeli
- Kapice: ukalupljeno
- Konektor 1: Mini DP, utikač
- Konektor 2: DP, priključak
- Površina konektora: poniklano
- Duljina: 0.15 m
- AOC - aktivni optički kabel: Ne
- oklop: dvostruki oklop

## Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	80	6.10	20.00	30.00	40.00	24.00
Packaging Unit Inside	20	1.53	24.00	17.00	28.00	11.42
Packaging Unit Single	1	0.08	26.00	7.50	2.50	487.50
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

**More images:**

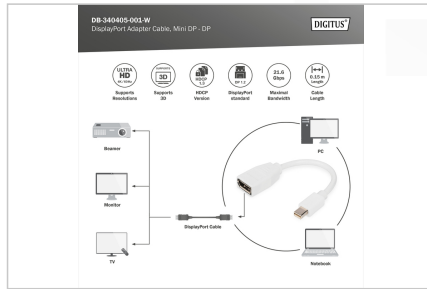

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)