

DIGITUS HDMI Adapter

AK-330500-000-S
EAN 4016032296140



HDMI Adapter, Type A F/F, UHD 4K@60Hz, bl

This HD and 3D suitable adapter can be used for extension of two connection cables, for example.

4K/Ultra HD and 3D capable + Ethernet connectivity

- Support up to 4K/2K with 60Hz


Attributes

- Assortment: HDMI Cables
- Color connector: black

- Connector 1: HDMI type A, jack
- Connector 2: HDMI type A, jack
- Connector surface: nickel-plated
- HDMI Standard: Premium High Speed HDMI with Ethernet
- HDTV Resolution max.: 3840 x 2160 Pixel, 60Hz
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Packaging: Polybag
- AOC - Active Optical Cable: no
- Shielding: single shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	350	5.60	32.00	30.00	22.00	21.12
Packaging Unit Inside	50	0.80	24.50	20.00	4.50	2,205.00
Packaging Unit Single	1	16.00	8.50	8.50	1.00	72.25
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

More images:

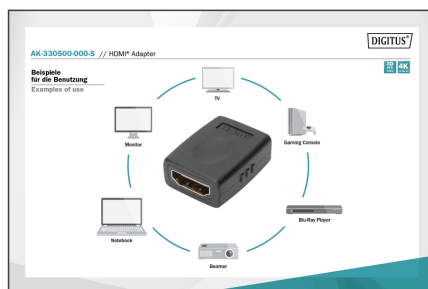

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable.
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com