

# DIGITUS® DVI Connection Cable

AK-320101-050-S

EAN 4016032298335



**DVI connection cable, DVI(24+1), 2x ferrit M/M, 5.0m, DVI-D Dual Link, bl**

This digital, Full HD suitable DVI cable (Dual Link), is used to connect audio/video equipment with DVI(24+1) interface, such as PC, notebook, monitor, TV or a projector, for example.

**Full HD, Dual-Link**

- Support up to 2560 x 1600 pixel with 30Hz


**Attributes**

- Ambalaža: Polybag
- Asortiman: DVI kabeli
- AWG: 30

- Feritni filter: 2 x feritne kuglice
- HDTV-norma: Full HD
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: DVI-D, (24+1), utikač
- Konektor 2: DVI-D, (24+1), utikač
- Konektor u boji: crni
- Materijal žice: CU
- Površina konektora: poniklano
- rezolucija maks.: 2560 x 1600 piksela, 60 Hz
- Duljina: 5 m
- oklop: trostruki oklop

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 20           | 11.60       | 38.00      | 30.00      | 30.00       | 34.20           |
| Packaging Unit Inside        | 5            | 2.90        | 26.00      | 30.00      | 17.00       | 13.26           |
| Packaging Unit Single        | 1            | 0.58        | 22.00      | 20.00      | 6.00        | 2.64            |
| Net single without Packaging | 0            | 0.49        | 20.00      | 18.00      | 5.50        | 1.98            |

**More images:**

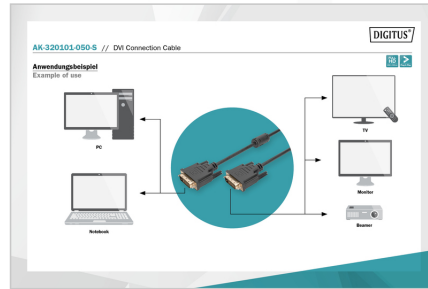

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)