




# DIGITUS® Datatransfer extension cable, D-Sub9/M - D-Sub9/F

AK-610203-100-E  
EAN 4016032301493

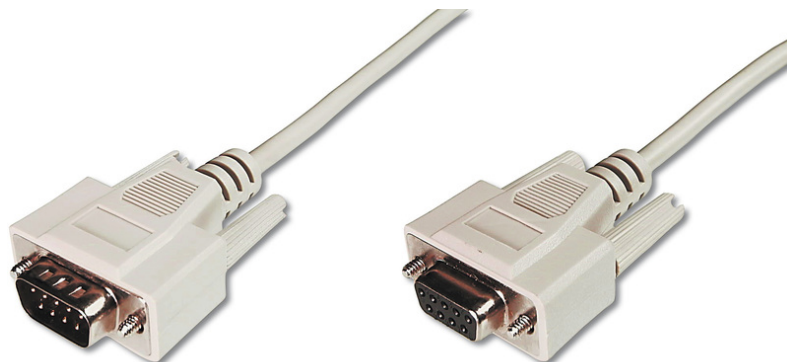

### Datatransfer extension cable, D-Sub9 M/F, 10.0m, serial molded, be

This 9-pin serial cable is ideal for the extension of the cable distance between serial devices or useable directly as connection cable.

#### Enables a save and stable connection

- The additional screw combination in at the entrance as well as at the exit provides by the professional application for maximum security. Simply turn the screw cap in the intended socket - ready. The inattentive remove of the D-Sub plug is not possible any more.

#### Attributes

- Asortiman: Serijski kablovi

- AWG: 28
- Kabel u boji: bež
- Kapice: ukalupljeno
- Konektor 1: DSUB, 9-polni, utikač
- Konektor 2: DSUB, 9-polni, priključak
- Konektor u boji: bež
- Materijal žice: CU
- Površina konektora: poniklano
- Zadatak: 1:1
- Duljina: 10 m
- oklop: jednostruki oklop

### Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	20	9.10	35.00	22.00	28.00	21.56
Packaging Unit Inside	1	0.46	27.00	24.00	3.00	1.94
Packaging Unit Single	1	0.46	27.00	24.00	4.50	2.92
Net single without Packaging	0	0.40	20.00	18.50	4.00	1.48

### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)