

# DIGITUS® mini GBIC (SFP) Module, 1.25 Gbps, 20km

DN-81001

EAN 4016032305668



## 1.25 Gbps SFP Module, Singlemode LC Duplex Connector, 1310nm, up to 20km

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

### The plug and play fiber connection

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- High quality and excellent reliability
- 1.25 Gbps Maximum Data Rate
- Compliant to IEEE 802.3z Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant
- Hot pluggable

- Connector: 1x LC Duplex
- 1000Base-LX - For Long Haul
- Wavelength: 1310nm
- Transmission power: minimum -8 dBm, maximum -3 dBm
- Sensitivity receiving power: minimum -24 dBm
- For a Distance of up to 20km
- Suitable for OM3/OM4 Singlemode Fiber Cables
- Safe fast-locking mechanism
- 3.3V power supply
- Operating temperature: 0 °C ~ 70 °C

### Attributes


- Mod: Jednomodni
- Priključak: LC
- Udaljenost (km): 20
- Valna duljina: 1310 nm
- DDM podrška: Ne
- Kompatibilnost proizvođača: Univerzalni (MSA), Cisco
- Način emitiranja: Jednosmjerno
- Ethernet brzina: Gigabit

### Package contents

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	240	8.50	50.00	29.00	54.50	79.03
Packaging Unit Inside	30	1.06	7.00	20.00	30.00	4.20
Packaging Unit Single	1	0.04	9.00	12.00	3.00	324.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

**More images:**

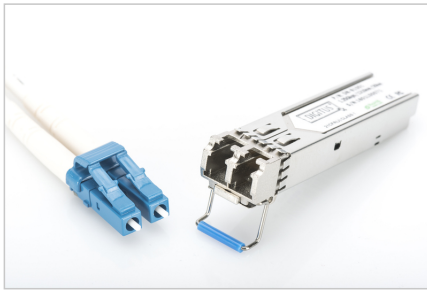

Product Number	SKU Code	Speed	Distance	Connector	Wavelength	Operating Temperature	Industrial Version
<b>Full Duplex</b>							
Dsh-1000	AS1000000000	10 Gbps	2 km	LC Multimode Duplex	10 Gbps	0 to 70 °C	
Dsh-1000	AS1000000002	10 Gbps	200m	LC Duplex OM3	7.5 Gbps/10 Gbps	0 to 70 °C	
Dsh-1000	AS1000000003	10 Gbps	200m	LC Duplex OM4	7.5 Gbps/10 Gbps	0 to 70 °C	
<b>Single</b>							
Dsh-1000	AS1000000001	10 Gbps	200m	LC Duplex Duplex	10 Gbps	0 to 70 °C	
Dsh-1000	AS1000000004	10 Gbps	200m	LC Duplex Duplex	10 Gbps	0 to 70 °C	
Dsh-1000	AS1000000005	10 Gbps	200m	LC Duplex Duplex	7.5 Gbps/10 Gbps	0 to 70 °C	
Dsh-1000	AS1000000006	10 Gbps	200m	LC Duplex Duplex	7.5 Gbps/10 Gbps	0 to 70 °C	
Dsh-1000	AS1000000007	10 Gbps	80 km	LC Duplex Duplex	10 Gbps	0 to 70 °C	
<b>SR</b>							
Dsh-1000	AS1000000008	10 Gbps	200m	LC Multimode Duplex	10 Gbps	0 to 70 °C	
Dsh-1000	AS1000000009	10 Gbps	10 km	LC Duplex Duplex	10 Gbps	0 to 70 °C	
<b>Industrial Version</b>							
Dsh-1000	AS1000000010	10 Gbps	200m	LC Duplex Duplex	7.5 Gbps/10 Gbps	-40 to 85 °C	✓
Dsh-1000	AS1000000011	10 Gbps	200m	LC Duplex Duplex	7.5 Gbps/10 Gbps	-40 to 85 °C	✓
Dsh-1000	AS1000000012	10 Gbps	200m	LC Duplex Duplex	10 Gbps	-40 to 85 °C	✓
Dsh-1000	AS1000000013	10 Gbps	200m	LC Duplex Duplex	10 Gbps	-40 to 85 °C	✓
Dsh-1000	AS1000000014	10 Gbps	200m	LC Duplex Duplex	7.5 Gbps/10 Gbps	-40 to 85 °C	✓

**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)