

DIGITUS® mini GBIC (SFP) Module, 1.25 Gbps, 80km

DN-81002

EAN 4016032305675



1.25 Gbps SFP Module, Singlemode LC Duplex Connector, 1550nm, up to 80km

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

The plug and play fiber connection

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- High quality and excellent reliability
- 1.25 Gbps Maximum Data Rate
- Compliant to IEEE 802.3z Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant
- Hot pluggable

- Connector: 1x LC Duplex
- 1000Base-ZX - For Long Haul
- Wavelength: 1550nm
- Transmission Power: Minimum 0 dBm, Maximum 5 dBm
- Sensitivity Receiving Power: Minimum -32 dBm
- For a Distance of up to 80km
- Suitable for OM3/OM4 Singlemode Fiber Cables
- Safe fast-locking mechanism
- 3.3V power supply
- Operating temperature: 0 °C ~ 70 °C

Attributes


- Mod: Jednomodni
- Priključak: LC
- Udaljenost (km): 80
- Valna duljina: 1550 nm
- DDM podrška: Ne
- Kompatibilnost proizvođača: Univerzalni (MSA), Cisco
- Način emitiranja: Jednosmjerno
- Ethernet brzina: Gigabit

Package contents

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	240	8.50	50.00	29.00	54.50	79.03
Packaging Unit Inside	30	1.06	7.00	20.00	30.00	4.20
Packaging Unit Single	1	0.04	9.00	11.50	3.00	310.50
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

More images:

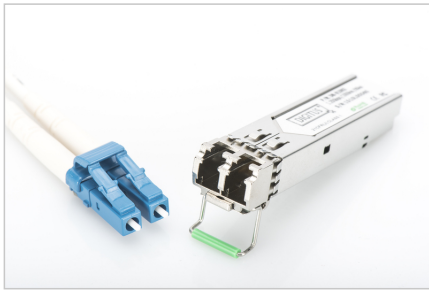

Part Number	Rate	Speed	Distance	Connector	Mounting	Operating Temperature	Industrial Model
SFP Modules							
Fast Ethernet							
DS-4000	10/100	10/100 Mbps	10 km	LC	Mini-GBIC	0 to 70 °C	
DS-4001	10/100	10/100 Mbps	10 km	LC	Standard GBIC	0 to 70 °C	
DS-4002	10/100	10/100 Mbps	10 km	LC	Standard GBIC	0 to 70 °C	
Gigabit							
DS-4003	10/100/1000	10/100/1000 Mbps	10 km	LC	Mini-GBIC	0 to 70 °C	
DS-4004	10/100/1000	10/100/1000 Mbps	10 km	LC	Standard GBIC	0 to 70 °C	
DS-4005	10/100/1000	10/100/1000 Mbps	10 km	LC	Standard GBIC	0 to 70 °C	
DS-4006	10/100/1000	10/100/1000 Mbps	10 km	LC	Standard GBIC	0 to 70 °C	
DS-4007	10/100/1000	10/100/1000 Mbps	10 km	LC	Standard GBIC	0 to 70 °C	
DS-4008	10/100/1000	10/100/1000 Mbps	10 km	LC	Standard GBIC	0 to 70 °C	
10G							
DS-4009	10/100/10000	10/100/10000 Mbps	10 km	LC	Mini-GBIC	0 to 70 °C	
DS-4010	10/100/10000	10/100/10000 Mbps	10 km	LC	Standard GBIC	0 to 70 °C	
Fast Ethernet							
DS-4011	10/100	10/100 Mbps	10 km	LC	Standard GBIC	0 to 70 °C	✓
DS-4012	10/100	10/100 Mbps	10 km	LC	Standard GBIC	0 to 70 °C	✓
DS-4013	10/100	10/100 Mbps	10 km	LC	Standard GBIC	0 to 70 °C	✓
DS-4014	10/100	10/100 Mbps	10 km	LC	Standard GBIC	0 to 70 °C	✓
DS-4015	10/100	10/100 Mbps	10 km	LC	Standard GBIC	0 to 70 °C	✓
DS-4016	10/100	10/100 Mbps	10 km	LC	Standard GBIC	0 to 70 °C	✓
DS-4017	10/100	10/100 Mbps	10 km	LC	Standard GBIC	0 to 70 °C	✓
DS-4018	10/100	10/100 Mbps	10 km	LC	Standard GBIC	0 to 70 °C	✓
DS-4019	10/100	10/100 Mbps	10 km	LC	Standard GBIC	0 to 70 °C	✓
DS-4020	10/100	10/100 Mbps	10 km	LC	Standard GBIC	0 to 70 °C	✓

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com