

DIGITUS 4K HDMI High-Speed Connecting Cable, Type D to Type A

DB-330109-020-S
EAN 4016032320784



HDMI High Speed connection cable, type D - A M/M, 2.0m, w/Ethernet, former HDMI 1.4,

This HD and 3D-compatible cable serves to connect audiovisual devices with HDMI Type D (Micro HDMI) interface such as notebooks to a TV, monitor or PC. With this cable standard, the high speed HDMI cable supports all current requirements – from the transmission of high-resolution UHD 4K content, also in 3D, or two-way audio transmission (ARC) and control of HDMI devices via CEC. Internet applications can also be used via the HDMI cable without the additional need to connect an Ethernet cable. Lip Sync means that delayed lip movement is a thing of the past. This cable can also be used to transmit up to 32 audio channels and enjoy image output in 21:9 CinemaScope format. Get more out of your Blu-ray player, gaming console or HD streaming portal. Gold-plated contacts and triple shielding of the cable ensure maximum conductivity and interference-free transmission.

4K/ULtra HD and 3D-enabled + Ethernet connectivity

- Supports 4K/2K with 30 Hz
- 3D support

- Supports audio return channel (ARC)
- Supports Consumer Electronic Control (CEC)
- With Ethernet channel (HEC)

Attributes



- AWG: 32
- Feritni filter: nema
- HDMI-norma: HDMI velike brzine s Ethernetom
- HDTV rezolucija maks.: 4096 x 2160 piksela, 30 Hz
- HDTV-norma: Ultra HD 4K
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: HDMI tip D (mikro), utikač
- Konektor 2: HDMI tip A, utikač
- Površina konektora: pozlaćeno
- Duljina: 2 m
- AOC - aktivni optički kabel: Ne
- oklop: trostruki oklop

Package contents

- 1 x 4K HDMI Type D to Type A High-Speed Connecting Cable

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|--------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
| Packaging Unit Carton | 50 | 12.50 | 36.50 | 10.40 | 26.00 | 0.00 |
| Packaging Unit Inside | 1 | 0.25 | 0.00 | 0.00 | 0.00 | 0.00 |
| Packaging Unit Single | 1 | 0.25 | 3.50 | 10.00 | 25.50 | 892.50 |
| Net single without Packaging | 0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

More images:

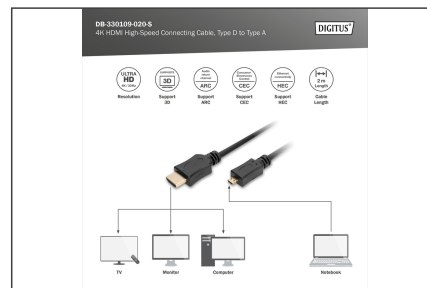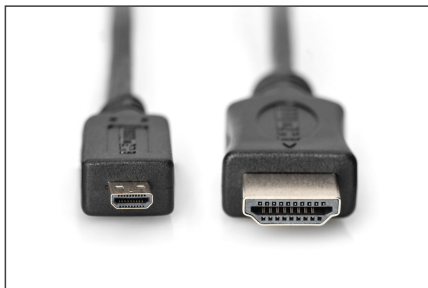

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com