


# DIGITUS® USB-A - Mini-B connection cable, 1m

DB-300130-010-S

EAN 4016032323235

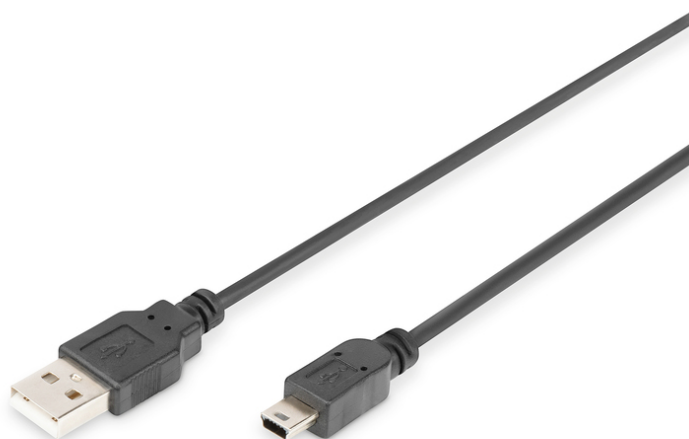

**USB 2.0 connection cable, type A - mini B (5pin) M/M, 1.0m, USB 2.0 conform, bl**

For connecting external USB end devices with Mini B (5-pin) socket, e.g. digital cameras, action cameras, external hard disks, games consoles, navigation devices and printers to the USB host (e.g. PC, notebook or USB hub). Transfer rate up to 480 Mbps (high-speed). As the DIGITUS® USB cables are compatible with all common devices and manufacturers, this cable can be used universally. The 1m cable length ensures convenient use.

**The USB cables from DIGITUS® are compatible with devices such as digital cameras, action cameras, external hard disks, games consoles, navigation devices and printers with a mini USB port.**

- Transfer rate up to 480 Mbps (high-speed)

**Attributes**



- Asortiman: USB kabeli
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: USB A, utikač
- Konektor 2: Mini USB B, 5-polni, utikač
- Konektor u boji: crni
- Površina konektora: poniklano
- USB sukladnost: USB 2,0
- Duljina: 1 m

**Package contents**

- 1 x USB 2.0 connection cable, type A to mini B

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	72	3.50	49.50	29.00	33.50	48,089.20
Packaging Unit Inside	12	0.58	27.00	25.00	16.00	10.80
Packaging Unit Single	1	0.05	2.30	7.50	23.50	405.38
Net single without Packaging	0	0.03	1.50	6.00	20.00	180.00

**More images:**

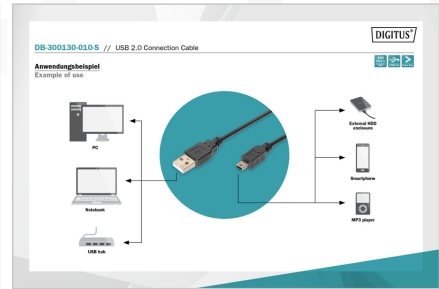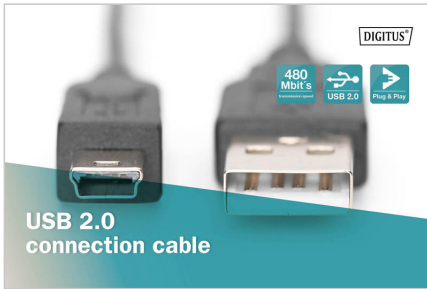

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)