

DIGITUS mini GBIC (SFP) Module, 10Gbps, 0.3km, with DDM Feature

DN-81200

EAN 4016032324133



10G SFP+ Module, Multimode, DDM LC Duplex Connector, 850nm, up to 300m

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

The plug and play fiber connection

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- Supports DDM (Digital Diagnostic Monitoring)
- High quality and excellent reliability
- 10 Gbps Maximum Data Rate
- Compliant to IEEE802.3ae 10 Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation

- MSA (Multi Source Agreement) compliant
- Hot pluggable
- Connector: 1x LC Duplex
- Wavelength: 850nm
- Transmission Power: Minimum -5 dBm, Maximum -1 dBm
- Empfangssensitivität: Minimum -11,5 dBm
- For a distance of up to 0.3km
- Safe fast-locking mechanism
- 3.3V power supply
- Operating temperature: 0 °C ~ 70 °C

Attributes

- Mode: Multimode
- Connector: LC
- Distance (km): 0.3
- Wavelength: 850 nm
- DDM Support: yes
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: Cisco
- Ethernet speed: 10 Gigabit


Package contents

- SFP module

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	20	0.80	41.00	26.00	16.00	17.06
Packaging Unit Inside	1	0.04	3.00	11.50	9.00	310.50
Packaging Unit Single	1	0.04	3.00	11.50	9.00	310.50
Net single without Packaging	0	0.03	5.50	1.20	0.80	5.28

More images:

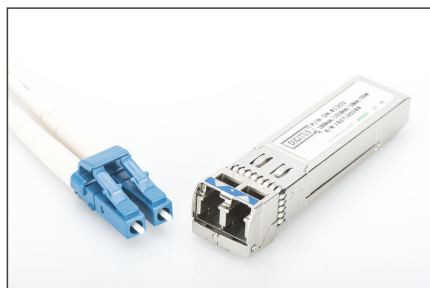

SFP Modules						
Part Number	Rate	Speed	Distance	Connector	Wavelength	Operating Temperature
Fast Ethernet						
Di-4100	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4101	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4102	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4103	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Gigabit Ethernet						
Di-4104	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4105	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4106	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4107	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4108	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4109	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4110	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4111	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4112	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4113	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4114	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4115	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4116	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4117	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4118	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4119	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4120	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4121	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4122	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4123	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4124	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4125	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4126	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4127	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4128	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4129	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4130	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4131	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4132	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4133	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4134	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4135	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4136	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4137	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4138	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4139	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4140	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4141	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4142	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4143	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4144	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4145	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4146	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4147	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4148	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4149	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4150	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4151	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4152	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4153	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4154	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4155	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4156	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4157	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4158	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4159	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4160	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4161	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4162	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4163	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4164	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4165	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4166	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4167	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4168	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4169	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4170	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4171	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4172	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4173	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4174	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4175	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4176	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4177	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4178	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4179	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4180	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4181	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4182	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4183	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4184	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4185	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4186	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4187	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4188	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4189	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4190	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4191	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4192	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4193	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4194	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4195	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4196	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4197	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4198	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C
Di-4199	10/100/1000	10/100/1000	10 km	LC	1550nm	-40 to +70 °C
Di-4200	10/100/1000	10/100/1000	10 km	LC	1310nm	-40 to +70 °C

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com