

# DIGITUS® DisplayPort Connection Cable

AK-340103-010-S

EAN 4016032329428



### DisplayPort Connection Cable, Type DP M/M, 1.0m, w/interlock, Full HD, DP 1.1a conf., bl

This high performance HD digital audio and video cable for example is used to connect a PC or notebook with DisplayPort interface to a monitor with DisplayPort interface.

#### Ideal for CAD/CAM, GIS, 3D modeling, real time simulation, and more.

- Full HD resolution up to 1080p
- Supported transmission modes: RBR, HBR, HBR2
- Maximal bandwidth: 10,8 Gbps
- HBR-Version/transfer mode: HBR1 (2,70 Gbit/s per lane)
- HDCP-Version: HDCP 1.3


#### Attributes

- Asortiman: DisplayPort kabeli

- Blokiranje: Zatvarač na kopču
- DisplayPort standard: DisplayPort 1.1a
- Feritni filter: nema
- HDTV-norma: Full HD
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: DP, utikač
- Konektor 2: DP, utikač
- Konektor u boji: crni
- Površina konektora: poniklano
- rezolucija maks.: 1920 x 1080 piksela, 60 Hz
- Duljina: 1 m
- AOC - aktivni optički kabel: Ne
- oklop: dvostruki oklop

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	140	8.40	21.00	33.00	51.00	35.34
Packaging Unit Inside	10	0.60	18.00	33.00	4.50	2.67
Packaging Unit Single	1	0.06	1.50	15.00	24.00	540.00
Net single without Packaging	0	0.06	1.50	15.00	24.00	540.00

**More images:**

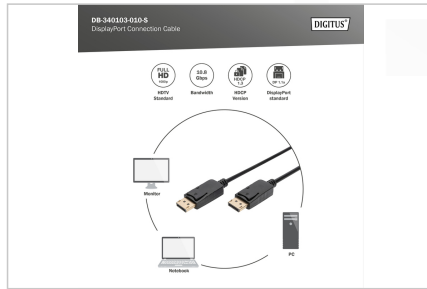

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)