

DIGITUS® CAT 6A U/FTP installation cable, 100 m, simplex, Eca

DK-1623-A-VH-1

EAN 4016032344117



CAT 6A U-FTP installation cable, 500 MHz Eca (EN 50575), AWG 23/1, 100m paper box, sx, blue

The Digitus® Cat.6A U/FTP installation cable is characterized by the following cable construction 4x2x AWG23/1 and reaches a transmission frequency up to 500 MHz. The halogen free cable jacket is conform to the standard IEC 60332-1, FRNC-B, LSZH-1 and CPR Euro class Eca. The cable is suitable for building structured cabling in the secondary and tertiary area. Compliant with the following standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-10-1.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 23/1
- System/s of AVCP: AVCP 3
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shielding: Aluminum foil, providing 100 % coverage
- Overall shielding: None, with drain wire
- Outer sheath: Eca to B2ca acc. to EN 50575; LSZH
- Outer sheath color: Light blue (RAL 5012)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60 °C
- Operating temperature range: -20 °C up to +75 °C


- Installation temperature range: 0 °C up to +50 °C
- Overall diameter Simplex (nominal): 7.0 (Eca); 7,2 mm (Dca); 7,6 mm (Cca); 7,6 mm (B2ca)
- Weight (kg/km): 56 kg (Eca); 57 kg (Dca); 58 kg (Cca); 58 kg (B2ca)
- Electrical properties:
- Impedance: 100±15 Ohm @ 4 - 100MHz; 100±25 Ohm @100-500 MHz
- Capacitance: 45 pF/m nominal @ 1KHz
- Capacitance unbalance (pair-ground): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC loop resistance: 190 Ohm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 2
- Signal propagation delay: 450 nS/100 m max.
- Propagation delay: 15 nS/100 m max.
- Separating class: "c" acc. to EN 50174-2
- NVP: 70%

Attributes

- Asortiman: Instalacijski kabeli s upredenim paricama
- Kategorija: CAT 6A
- Oklop: U-FTP, parovi u metalnoj foliji
- CPR: Eca
- Duljina: 100 m
- Boja: svijetlo plavi
- Kapica: LSOH
- Struktura: 4 x 2 AWG 23/1, kruto upletena parica

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	4.50	33.00	32.00	11.00	11.62
Packaging Unit Inside	1	4.50	33.00	32.00	11.00	11.62
Packaging Unit Single	1	4.50	33.00	32.00	11.00	11.62
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

More images:

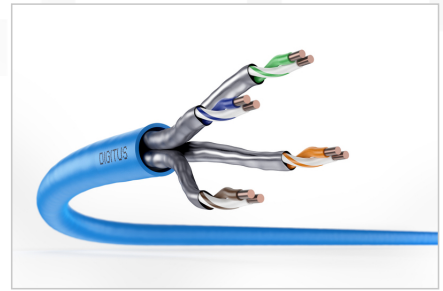

DIGITUS

AWG 23/1
500 MHz
10 Gbit Ethernet
20°/75°
LSZH
Eca
Cat 6a class

CAT 6a U/FTP Installation Cable, 100 m, Simplex, Eca

DIGITUS

DK-1623-A-VH-1 // CAT 6, U/FTP Installation Cable, 100m, Simplex, Eca

Anwendungsbeispiel
Example of use

DIGITUS

DK-1623-A-VH-1 // CAT 6, U/FTP Installation Cable, 100m, Simplex, Eca

Kabelquerschnitt
Cable cross section

DIGITUS

Produktdatenblatt / Product Information	Physikalische Spezifikationen / Physical Properties
Bestandteile / Components	Materialien / Materials
Technische Eigenschaften / Technical Properties	Mechanische Eigenschaften / Mechanical Properties
Umweltbedingungen / Environmental Conditions	Abmessungen / Dimensions
Zusätzliche Informationen / Additional Information	Normen / Standards

DIGITUS

Leitungsgruppencharakteristiken / Transmission Properties

Strecke / Distance	ATT	MLT	PL NEXT	ALN	PL NEXT	DL	SLNEXT	PL NEXT
1	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
10	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
100	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2
1000	622.2	622.2	622.2	622.2	622.2	622.2	622.2	622.2

Intertek

ETL Verified Certificate of Conformance Number: 1942299KCFP-011

ETL Verified Certificate of Conformance

Product Description: CAT 6 U/FTP Installation Cable, 100m, Simplex, Eca

Approved by: [Signature]

GHMT

Certificate No. 19884-21

Zertifikat No. 19884-21

Category 6e

Category 6e

GHMT Type Approval

DIGITUS

DIGITUS

EN 50173-1

EN 50173-2

EN 50173-3

EN 50173-4

EN 50173-5

EN 50173-6

EN 50173-7

EN 50173-8

EN 50173-9

EN 50173-10

EN 50173-11

EN 50173-12

EN 50173-13

EN 50173-14

EN 50173-15

EN 50173-16

EN 50173-17

EN 50173-18

EN 50173-19

EN 50173-20

EN 50173-21

EN 50173-22

EN 50173-23

EN 50173-24

EN 50173-25

EN 50173-26

EN 50173-27

EN 50173-28

EN 50173-29

EN 50173-30

EN 50173-31

EN 50173-32

EN 50173-33

EN 50173-34

EN 50173-35

EN 50173-36

EN 50173-37

EN 50173-38

EN 50173-39

EN 50173-40

EN 50173-41

EN 50173-42

EN 50173-43

EN 50173-44

EN 50173-45

EN 50173-46

EN 50173-47

EN 50173-48

EN 50173-49

EN 50173-50

EN 50173-51

EN 50173-52

EN 50173-53

EN 50173-54

EN 50173-55

EN 50173-56

EN 50173-57

EN 50173-58

EN 50173-59

EN 50173-60

EN 50173-61

EN 50173-62

EN 50173-63

EN 50173-64

EN 50173-65

EN 50173-66

EN 50173-67

EN 50173-68

EN 50173-69

EN 50173-70

EN 50173-71

EN 50173-72

EN 50173-73

EN 50173-74

EN 50173-75

EN 50173-76

EN 50173-77

EN 50173-78

EN 50173-79

EN 50173-80

EN 50173-81

EN 50173-82

EN 50173-83

EN 50173-84

EN 50173-85

EN 50173-86

EN 50173-87

EN 50173-88

EN 50173-89

EN 50173-90

EN 50173-91

EN 50173-92

EN 50173-93

EN 50173-94

EN 50173-95

EN 50173-96

EN 50173-97

EN 50173-98

EN 50173-99

EN 50173-100



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- For indoor cables (LSZH jacket): Suitable only for installation in dry indoor environments.
- The data cables must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com