


DIGITUS® CAT 6A U/UTP installation cable, 500 m, simplex, Eca

DK-1613-A-VH-5

EAN 4016032344209

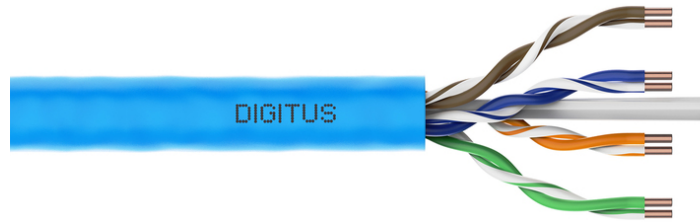

CAT 6A U-UTP installation cable, 500 MHz Eca (EN 50575), AWG 23/1, 500 m drum, sx, blue

The Digitus Cat 6A U/UTP installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-11-1, DIN EN 50173, IEC 60332-1. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE and POE+.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 23/1
- Insulation: HD-PE (High Density Polyethylene)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shield: None
- Overall shielding: None
- Outer sheath: Eca to B2ca acc. to EN 50575; LSZH
- Outer sheath diameter (nominal): 0,5 mm (Eca); 0,6 mm (Dca); 1,2 mm (Cca); 1,4 mm (B2ca)
- Outer sheath color: Light blue (RAL 5012)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60 °C
- Operating temperature range: -20 °C up to +75 °C




- Installation temperature range: 0 °C up to +50 °C
- Overall diameter Simplex (nominal): 7,1 mm (Eca); 7,3 mm (Dca); 7,4 mm (Cca); 7,6 mm (B2ca)
- Weight (kg/km): 53 kg (Eca); 54 kg (Dca); 55 kg (Cca); 56 kg (B2ca)
- Electrical properties:
- Impedance: 100±50Ω @ 1 - 600MHz
- Capacitance: 40 pF/m nominal @ 1 KHz
- Capacitance unbalance (pair-ground): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GΩm x km min.
- DC loop resistance: 147 Ω/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 2
- Signal propagation delay: 450 nS/100 m max.
- Propagation delay: 10 nS/100 m max.
- Separating class: "c" acc. to EN 50174-2
- NVP: 70%

Attributes

- Asortiman: Instalacijski kabeli s upredenim paricama
- Kategorija: CAT 6A
- Oklop: U-UTP, neoklopljeno
- CPR: Eca
- Duljina: 500 m
- Boja: svijetlo plavi
- Kapica: LSOH
- Struktura: 4 x 2 AWG 23/1, kruto upletena parica

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
| Packaging Unit Carton | 1 | 27.50 | 50.00 | 50.00 | 22.00 | 55.00 |
| Packaging Unit Inside | 1 | 27.50 | 50.00 | 50.00 | 22.00 | 55.00 |
| Packaging Unit Single | 1 | 27.50 | 50.00 | 50.00 | 22.00 | 55.00 |
| Net single without Packaging | 0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

More images:

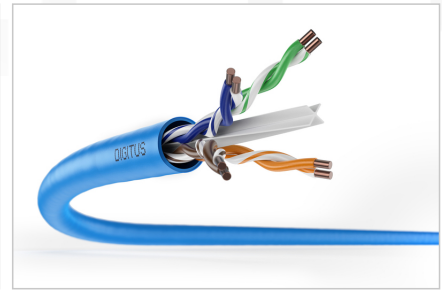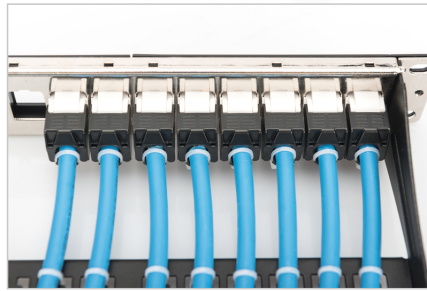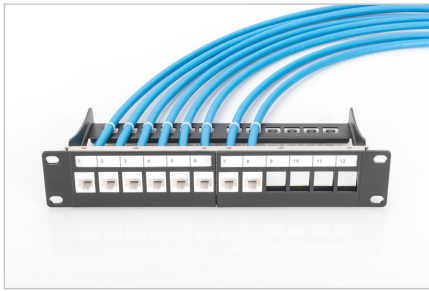

DIGITUS

AWG 23/1
500 MHz
10 Gbit Ethernet
CAT 6a
20°/75°
LSZH
Eca
CPL class

CAT 6a U/UTP Installation Cable, 500 m, Simplex, Eca

DIGITUS

DK-1613-A-VH-S // CAT 6a U/UTP Installation Cable, 500m, Simplex, Eca

Anwendungsbeispiel
Example of use

DIGITUS

DK-1613-A-VH-S // CAT 6a U/UTP Installation Cable, 500m, Simplex, Eca

Kabelquerschnitt
Cable cross section


DIGITUS

| Produktdaten / Product Information | Physikalische Spezifikationen / Physical Properties |
|--|--|
| Bestellnummer / Order Number: DK-1613-A-VH-S (500m, Simplex, Eca) | Standard / Standard: EN 50173-1, EN 50173-2, EN 50173-3, EN 50173-4, EN 50173-5, EN 50173-6, EN 50173-7, EN 50173-8, EN 50173-9, EN 50173-10, EN 50173-11, EN 50173-12, EN 50173-13, EN 50173-14, EN 50173-15, EN 50173-16, EN 50173-17, EN 50173-18, EN 50173-19, EN 50173-20, EN 50173-21, EN 50173-22, EN 50173-23, EN 50173-24, EN 50173-25, EN 50173-26, EN 50173-27, EN 50173-28, EN 50173-29, EN 50173-30, EN 50173-31, EN 50173-32, EN 50173-33, EN 50173-34, EN 50173-35, EN 50173-36, EN 50173-37, EN 50173-38, EN 50173-39, EN 50173-40, EN 50173-41, EN 50173-42, EN 50173-43, EN 50173-44, EN 50173-45, EN 50173-46, EN 50173-47, EN 50173-48, EN 50173-49, EN 50173-50, EN 50173-51, EN 50173-52, EN 50173-53, EN 50173-54, EN 50173-55, EN 50173-56, EN 50173-57, EN 50173-58, EN 50173-59, EN 50173-60, EN 50173-61, EN 50173-62, EN 50173-63, EN 50173-64, EN 50173-65, EN 50173-66, EN 50173-67, EN 50173-68, EN 50173-69, EN 50173-70, EN 50173-71, EN 50173-72, EN 50173-73, EN 50173-74, EN 50173-75, EN 50173-76, EN 50173-77, EN 50173-78, EN 50173-79, EN 50173-80, EN 50173-81, EN 50173-82, EN 50173-83, EN 50173-84, EN 50173-85, EN 50173-86, EN 50173-87, EN 50173-88, EN 50173-89, EN 50173-90, EN 50173-91, EN 50173-92, EN 50173-93, EN 50173-94, EN 50173-95, EN 50173-96, EN 50173-97, EN 50173-98, EN 50173-99, EN 50173-100 |
| Bestellnummer / Order Number: DK-1613-A-VH-S (500m, Simplex, Eca) | Standard / Standard: EN 50173-1, EN 50173-2, EN 50173-3, EN 50173-4, EN 50173-5, EN 50173-6, EN 50173-7, EN 50173-8, EN 50173-9, EN 50173-10, EN 50173-11, EN 50173-12, EN 50173-13, EN 50173-14, EN 50173-15, EN 50173-16, EN 50173-17, EN 50173-18, EN 50173-19, EN 50173-20, EN 50173-21, EN 50173-22, EN 50173-23, EN 50173-24, EN 50173-25, EN 50173-26, EN 50173-27, EN 50173-28, EN 50173-29, EN 50173-30, EN 50173-31, EN 50173-32, EN 50173-33, EN 50173-34, EN 50173-35, EN 50173-36, EN 50173-37, EN 50173-38, EN 50173-39, EN 50173-40, EN 50173-41, EN 50173-42, EN 50173-43, EN 50173-44, EN 50173-45, EN 50173-46, EN 50173-47, EN 50173-48, EN 50173-49, EN 50173-50, EN 50173-51, EN 50173-52, EN 50173-53, EN 50173-54, EN 50173-55, EN 50173-56, EN 50173-57, EN 50173-58, EN 50173-59, EN 50173-60, EN 50173-61, EN 50173-62, EN 50173-63, EN 50173-64, EN 50173-65, EN 50173-66, EN 50173-67, EN 50173-68, EN 50173-69, EN 50173-70, EN 50173-71, EN 50173-72, EN 50173-73, EN 50173-74, EN 50173-75, EN 50173-76, EN 50173-77, EN 50173-78, EN 50173-79, EN 50173-80, EN 50173-81, EN 50173-82, EN 50173-83, EN 50173-84, EN 50173-85, EN 50173-86, EN 50173-87, EN 50173-88, EN 50173-89, EN 50173-90, EN 50173-91, EN 50173-92, EN 50173-93, EN 50173-94, EN 50173-95, EN 50173-96, EN 50173-97, EN 50173-98, EN 50173-99, EN 50173-100 |

DIGITUS


Leistungsmerkmale / Performance Characteristics

| Standard | 10G-T | 10G-B | 10G-K | 10G-L | 10G-M | 10G-N | 10G-O | 10G-P | 10G-Q | 10G-R | 10G-S | 10G-T | 10G-U | 10G-V | 10G-W | 10G-X | 10G-Y | 10G-Z |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 10G-T | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |

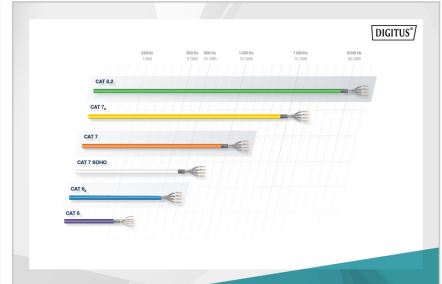

DIGITUS

| EN Norm | Bestandteil / Component | Leistungseigenschaften / Performance Characteristics | Anforderungen an die Verkabelung / Requirements for Cabling | Zusätzliche Informationen / Additional Information |
|---------|-------------------------|--|--|--|
| B2ca | Stark hoch / Very high | 1+ | • Spinnverflechtung • Kreuzverflechtung • Kreuzverflechtung • Kreuzverflechtung | • 100m • 100m • 100m • 100m |
| Cca | Hoch / High | 3 | • Spinnverflechtung • Kreuzverflechtung | • 100m • 100m |
| Dca | Mittel / Medium | | | |
| Eca | Gering / Low | | | |

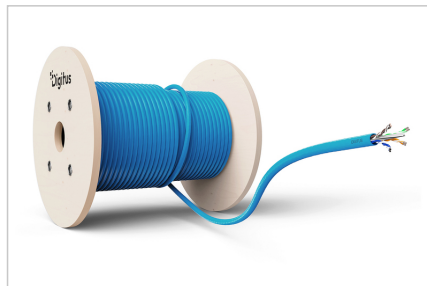

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com