

DIGITUS VGA UTP Extender Set

DS-53400
EAN 4016032356721



VGA Extender over UTP, Set max. resolution 1920x1200, signal extended by 300m

Extends the max. length of a VGA signal up to 300 m by using a simple UTP cable between the transmitter and receiver unit.

Easy and convenient distribution for VGA signals up to 300 m - Place your displays wherever you want without VGA cable limitations.

- Cat 5 VGA extender consisting of transmitter and receiver unit
- High resolution possible up to 1920 x 1200 pixels
- Supports stereo audio extension
- Dimensions (L x W x H): 110 mm x 75 mm x 25 mm
- Weight: 213 g (transmitter), 208 g (receiver)
- Operating temperature: 0 °C ~ 70 °C
- Operating humidity: 10 % ~ 85 % (non-condensing)

- Power input: 5 V @ 1 A, max 5 W

Attributes

- HDTV rezolucija maks.: 1920 x 1200 piksela, 60 Hz
- HDTV-norma: Full HD
- Kategorija: CAT 5e
- KVM: Ne
- PoE (napajanje preko Ethernet): Ne
- Priključci za video vezu: VGA
- Razmak: 300 m


Package contents

- 1x DIGITUS® VGA UTP Extender
- 2 x Power adapter (5 V/1 A)
- 1x User manual

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	15.20	60.00	36.50	25.50	55,845.00
Packaging Unit Inside	1	0.76	27.30	17.50	5.50	0.00
Packaging Unit Single	1	0.76	27.30	17.50	5.50	0.00
Net single without Packaging	0	0.21	11.00	7.50	2.50	206.25

More images:



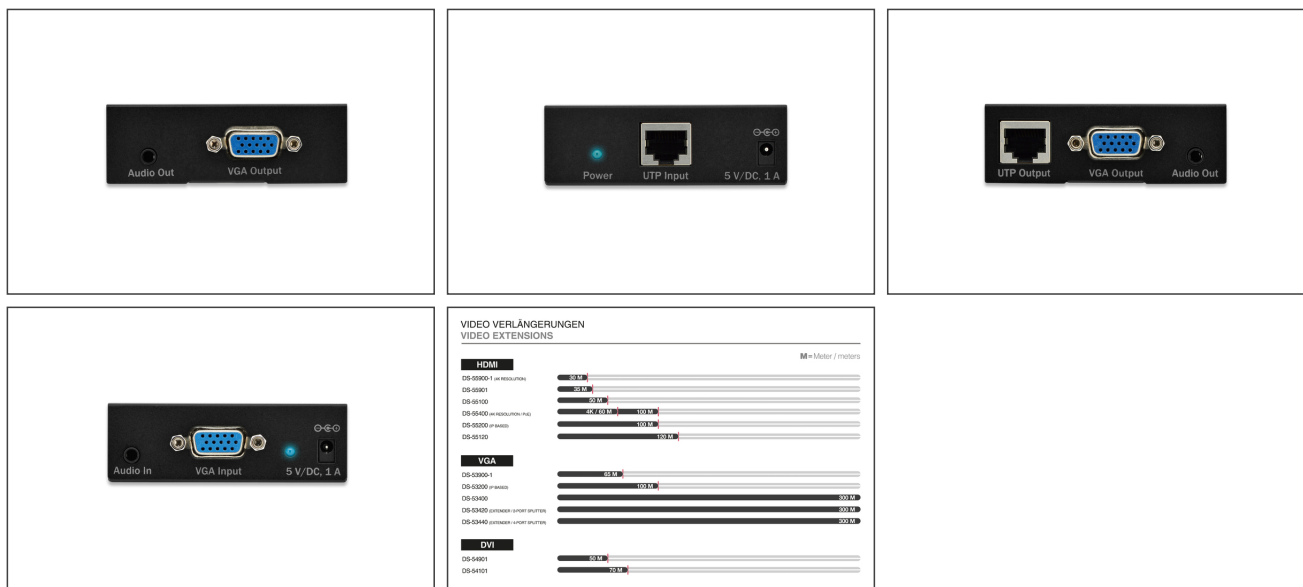

Safety notes

- If the device is powered by a plug-in power supply, ensure that the power adapter is connected correctly and meets the specified requirements (e.g. voltage and current).
- Only use certified CAT5e or CAT6 cables to ensure stable signal transmission.
- For particularly long cable runs or in environments prone to interference, it is recommended to use shielded network cables.
- Make sure that all connections are tight and secure to avoid loose contacts that could affect the signal quality. Make sure that the HDMI and Ethernet connections are connected correctly.
- Make sure that the CAT cable is not laid near high-voltage power lines or other strong sources of electromagnetic interference to avoid signal interference.
- Only operate the device within the specified temperature range.
- Do not use the device outdoors or in damp or wet environments
- Check all connections and cables regularly for wear or damage. Cables and connections can wear out, especially with frequent use or long installations, which can lead to poor signal quality or system failure.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com