

# DIGITUS® USB-C connection cable, USB-A - USB-C

AK-300136-010-S  
EAN 4016032368731



**USB Type-C connection cable, type C to A M/M, 1.0m, 3A, 5GB, 3.0 Version, bl**

For connecting external USB end devices (with C socket, e.g. tablet or smartphone) to the USB host (e.g. PC, notebook or USB hub). Transfer rate up to 5 Gbps (super speed).

**For super-fast synchronization and charging**


- SuperSpeed data transfers up to 5 Gbit/s - 10 times faster than USB 2.0
- Supports up to 3A power supply
- Supports the USB PD (Power delivery) specification.
- Backwards compatible with USB 2.0 and 1.1
- Type C plug can be used on both sides
- 56k pull-up resistance

**Attributes**

- Ambalaža: Polybag
- Asortiman: USB kabeli
- AWG: 24/28
- Feritni filter: nema
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: USB C, utikač
- Konektor 2: USB A, utikač
- Konektor u boji: crni
- Materijal žice: CU
- Površina konektora: poniklano
- USB sukladnost: USB 3.0 / 3.1
- Duljina: 1 m
- oklop: dvostruki oklop
- USB-C proizvodi: Da

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	150	10.90	50.00	32.00	21.00	33.60
Packaging Unit Inside	10	0.73	30.00	20.00	3.70	2.22
Packaging Unit Single	1	0.07	9.00	9.00	1.50	121.50
Net single without Packaging	0	0.05	9.00	9.00	1.50	121.50

**More images:**

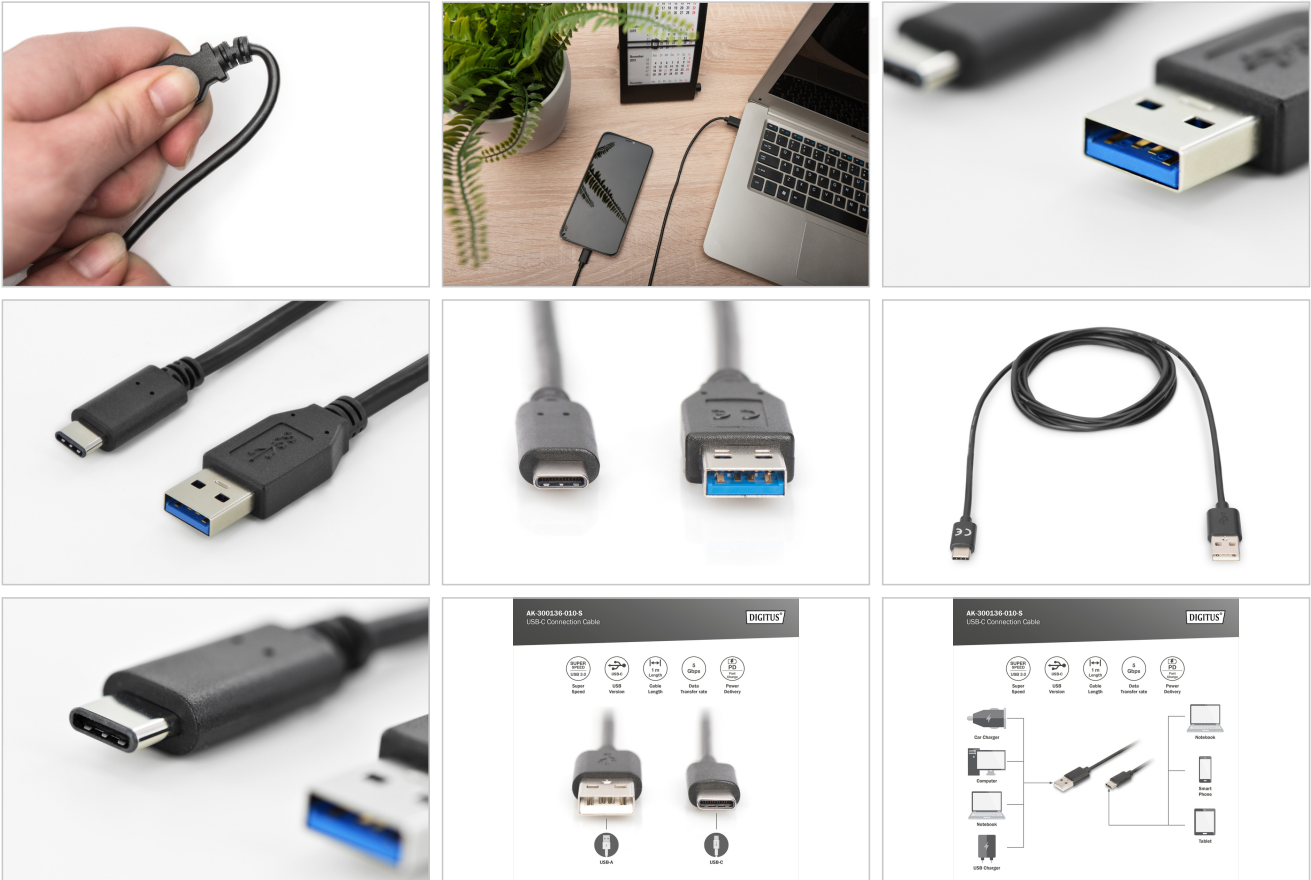

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
 info@assmann.com