

## DIGITUS Fiber Optic Splice Cassette for 24x splice protection

DN-96104 EAN 4016032368762






**Fiber Optic Splice Cassette 24 splices black with hinget cover** Different cable entries allow an optimal core connection. • incl. cover

| Logistics                    |                 |                |               |               |                |                 |
|------------------------------|-----------------|----------------|---------------|---------------|----------------|-----------------|
|                              | Number<br>(pcs) | Weight<br>(kg) | Depth<br>(cm) | Width<br>(cm) | Height<br>(cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 100             | 6.50           | 50.00         | 32.00         | 26.00          | 41.60           |
| Packaging Unit Inside        | 1               | 65.00          | 17.00         | 10.00         | 1.00           | 170.00          |
| Packaging Unit Single        | 1               | 65.00          | 17.00         | 10.00         | 1.00           | 170.00          |
| Net single without Packaging | 0               | 0.00           | 0.00          | 0.00          | 0.00           | 0.00            |

## More images:

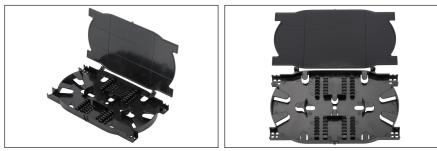

## Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- · To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- · Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum



operating temperature of the cable

• Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH Auf dem Schüffel 3 Lüdenscheid, Germany https://www.assmann.com info@assmann.com