

# DIGITUS® USB-C connection cable, USB-C - USB-C

AK-300138-010-S  
EAN 4016032368939



**USB Type-C connection cable, type C to C M/M, 1.0m, 5V/3A 15W, 480MB, 2.0 Version, bl**

For connecting external USB-C devices (e.g. tablet or smartphone) to the USB-C host (e.g. PC, notebook or USB hub). Data transfer rate up to 480 Mbps (high-speed).

**For super-fast synchronization and charging**


- Copper cores, foil and braid shielded for robustness and a reliable connection
- Data transfer rate up to 5 Gb/s (SuperSpeed)
- Power supply up to 5V/3A and 15W, 480Mbps
- Supports the USB PD (Power delivery) specification.
- Type C plug can be used on both sides

**Attributes**

- Asortiman: USB kabele
- AWG: 24/28
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: USB C, utikač
- Konektor 2: USB C, utikač
- Konektor u boji: crni
- Materijal žice: CU
- Površina konektora: poniklano
- Duljina: 1 m
- oklop: dvostruki oklop
- USB-C proizvodi: Da

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	400	6.50	50.00	32.00	21.00	33.60
Packaging Unit Inside	10	0.16	30.00	20.00	1.40	840.00
Packaging Unit Single	1	0.02	9.00	9.00	0.62	50.22
Net single without Packaging	0	0.01	9.00	9.00	0.62	50.22

**More images:**

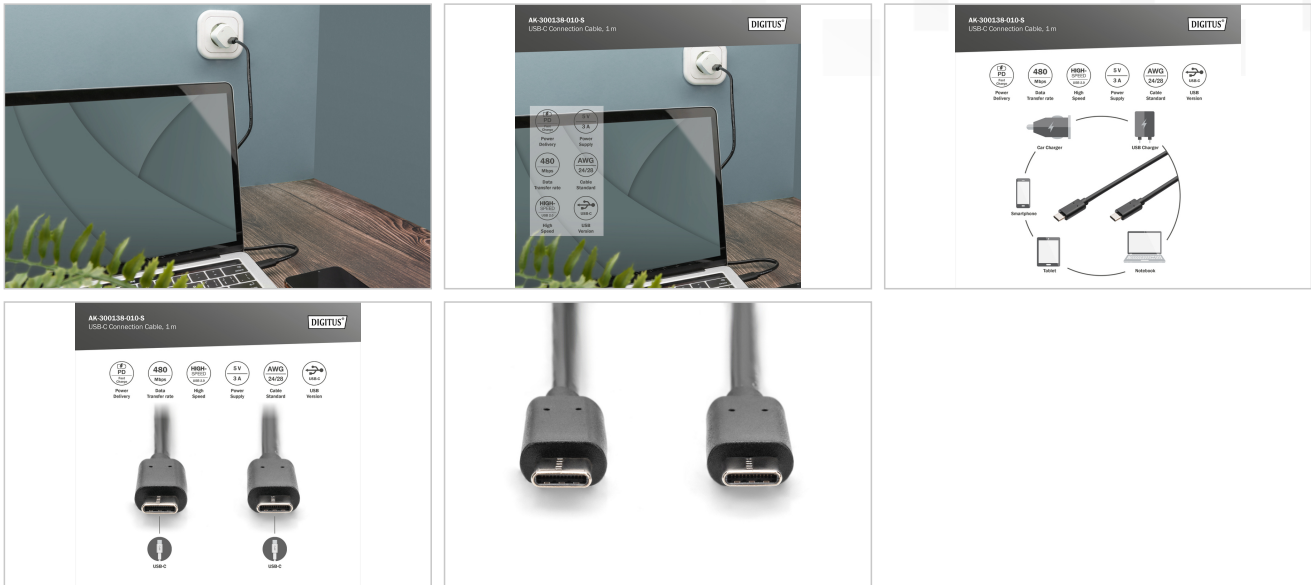

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)