

# DIGITUS® Lightning to USB A data/charging cable, MFI certified

DB-600106-010-W

EAN 4016032383932



## Charger/data cable, Lightning - USB A M/M, 1.0m, iP5/6/7, High Speed, MFI, wh

The DIGITUS® Lightning to USB - A data/charging cable is MFI - certified, registered and approved for all compatible Apple devices. You can connect all devices with a Lightning connector, e.g. iPhone, iPad or iPod, to your USB A-capable MacBook, notebook or PC for synchronizing or charging with this cable without any worries. The data/charging cable from DIGITUS® has been proven to withstand high tensile and bending stresses. This is reflected in the long service life of this cable.

### Ideal data and charging cable - 100% MFI-certified, compatible with all Lightning devices

- Supports fast charging for the following models: iPhone 14, iPhone 14 Plus, iPhone 14 Pro, iPhone 14 Pro Max, iPhone 12 Pro Max, iPhone 12 Pro, iPhone 12, iPhone 12 Mini, iPhone SE (2nd Generation), iPhone 11 Pro Max, iPhone 11 Pro, iPhone 11, iPhone Xs Max, iPhone Xs, iPhone Xr, iPhone X, iPhone 8 Plus, iPhone 8, iPhone 7 Plus, iPhone 7, iPhone SE, iPhone 6s Plus, iPhone 6s, iPhone 6 Plus, iPhone 6, iPhone 5s, and other Lightning end devices
- Chipset: C89
- Supported charging power: 12 W (5V / 2.4 A)
- Data rate: 480 Mbit/s
- Technical Attributes:
- Core material: CU

- Connection 1: Apple Lightning 8-pin, plug
- Connection 2: USB A, plug
- AWG: 30
- Color connections: nickel
- Cable color: white
- Hood: Plastic (PVC)
- Contact surface: gold-plated
- Length: 1 m
- Shielding: Double shielded

### Attributes

- AWG: 30
- Kabel u boji: bijeli
- Kapice: plastično
- Konektor 1: Apple Lightning 8-polni, utikač
- Konektor 2: USB A, utikač
- Konektor u boji: bijeli
- Materijal žice: CU
- Površina konektora: poniklano
- Duljina: 1 m
- oklop: dvostruki oklop


### Package contents

- 1 x Lightning to USB A data/charging cable, MFI-certified

## Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	80	5.80	52.00	32.50	30.50	51.55
Packaging Unit Inside	40	2.90	23.50	7.50	2.30	405.38
Packaging Unit Single	1	0.07	2.30	7.50	23.30	401.93
Net single without Packaging	0	0.04	1.50	6.00	15.00	135.00

**More images:**

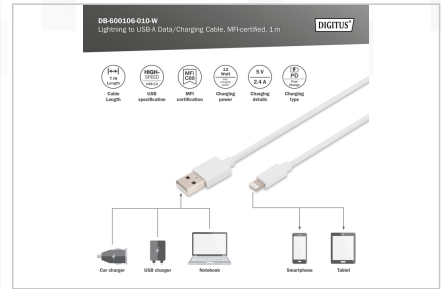

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)