


# DIGITUS Prespojni kabel, Kat. 6 S-FTP

**DB-160144-050-S**  
**EAN 4016032384069**

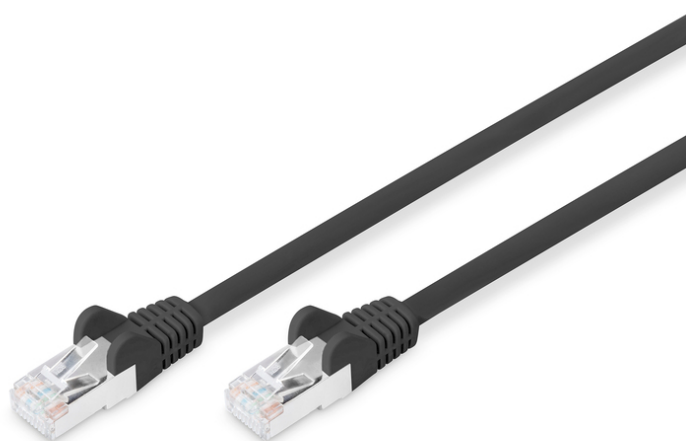

**Patch Cable, CAT6, RJ45 M/M, 5.0m, S-FTP, AWG 27/7,**

DIGITUS® prespojni kabeli Kat. 6 klase E proizvedeni su i testirani sukladno ISO/IEC 11801 i DIN EN 50173 Kat.6 specifikacijama. Garantiraju sukladnost ugrađenog sustava ožičenja zahtjevima specifikacija ISO & EN kanala i omogućuju optimalne razine performansi DIGITUS® kategorije 6 kabliranja. Performanse su testirane na brzinama do 250 MHz uključujući karakteristike performansi kao što je gubitak preslušavanje na bližem kraju ("NEXT"). DIGITUS® prespojni kabeli dizajnirani su i proizvedeni kako bi u potpunosti zadovoljili uporabu u različitim i najzahtjevnijim aplikacijama. Svaki kabel opremljen je s pregibnicom. Pregibnica je opremljena sa zaštitom polugice mikroutikača. Kategoriju 6 možete vrlo jednostavno prepoznati po mikroutikaču prozirno crvene boje. Ovaj mrežni kabel prikladan je za povezivanje opreme u komunikacijskim ormarima. Drugo područje primjene je ožičenje DSL telefonskih sustava.

**Vrhunsku kvalitetu Vaše mreže osigurava oprema proizvedena sukladno najnovijim standardima.**




- LSZH – low smoke zero halogen
- Pregibnica je opremljena sa zaštitom polugice mikroutikača.
- Color cable: black
- Color connector: black
- Hoods: plastic
- Assortment: Twisted Pair Patch Cables
- Length: 5 m
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Structure: 4 x 2 AWG 27/7, twisted pair
- Wire material: CU

**Package contents**

- 1x Prespojni kabel, Kat. 6 S-FTP, length 5 m, color black

| Logistics                    |              |             |            |            |             |           |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³       |
| Packaging Unit Carton        | 40           | 7.30        | 54.00      | 26.00      | 36.00       | 50,544.00 |
| Packaging Unit Inside        | 10           | 1,825.00    | 50.00      | 25.00      | 9.00        | 11.25     |
| Packaging Unit Single        | 1            | 0.18        | 5.00       | 7.50       | 23.50       | 881.25    |
| Net single without Packaging | 0            | 145.00      | 3.00       | 6.00       | 20.00       | 360.00    |

**More images:**

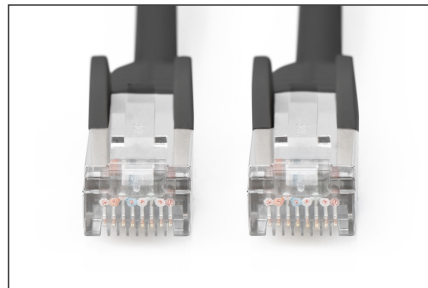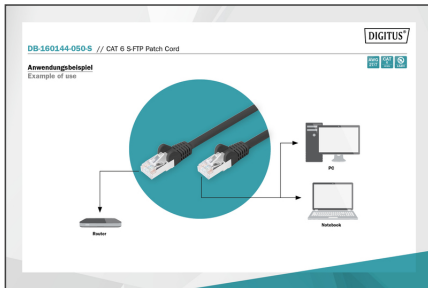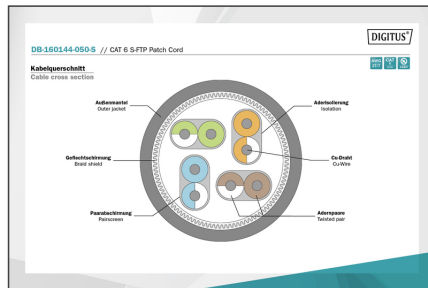

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Ensure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)