


# DIGITUS Prespojni kabel Kat. 6 U/UTP - LSZH

**DK-1617-015**  
**EAN 4016032387749**

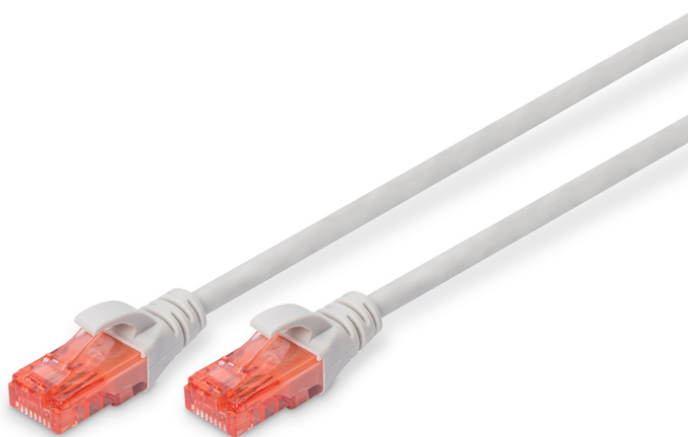

**DK-1617-015 PRES.KABEL UTP C6 LSOH 1,5M SIVI CU AWG 26/7, length 1.50 m, color grey**

DIGITUS® prespojni kabeli Kat. 6 klase E proizvedeni su i testirani sukladno ISO/IEC 11801 i DIN EN 50173 Kat. 6 specifikacijama. Garantiraju da će ugrađeni sustav ožičenja biti sukladan zahtjevima specifikacija ISO & EN i omogućiti optimalne razine performansi DIGITUS® kategorije 6 kabliranja. Performanse su testirane do 250 MHz uključujući karakteristike performansi kao što je preslušavanje na bližem kraju ("NEXT"). DIGITUS® prespojni kabeli dizajnirani su i proizvedeni kako bi u potpunosti zadovoljili uporabu u različitim i najzahtjevnijim aplikacijama. Svaki kabel opremljen je s pregibnicom i kapicom za zaštitu i lakše otpuštanje mikROUTIKAČA. Osim toga, priključni utikač opremljen je sa zaštitnom polugom koja štiti utikač od mehaničkog oštećenja. Kategoriju 6 možete vrlo jednostavno prepoznati po konektoru prozirno crvene boje.

**Vrhunska kvaliteta Vaše mreže osigurava oprema izrađena po standardima budućnosti.**

- 2x RJ45 (8P8C) konektora





- Kapica za zaštitom, pribor za odgovarajući radijus savijanja i pregibnicom
- Oznaka dužine na pregibnici
- Vodič: Bakar (Cu)

**Attributes**

- Ambalaža: DIGITUS Polybag
- Asortiman: Patch kabeli s upredenim paricama
- Konektor 1: Modularni RJ45 (8/8) utikač
- Konektor 2: Modularni RJ45 (8/8) utikač
- Konfiguracija: 1:1
- Kategorija: CAT 6
- Oklop: U-UTP, neoklopljeno
- Duljina: 1.5 m
- Boja: sivi
- Kapica: LSOH
- Struktura: 4 x 2 AWG 26/7, upletena parica
- Tanka verzija: Ne
- Flat Version: Ne

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	200	10.20	46.00	33.00	28.00	42.50
Packaging Unit Inside	10	0.51	10.00	34.00	5.00	1.70
Packaging Unit Single	1	0.05	1.60	14.00	25.00	560.00
Net single without Packaging	0	0.04	13.00	14.00	0.50	91.00

**More images:**

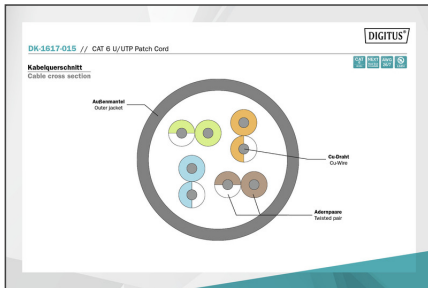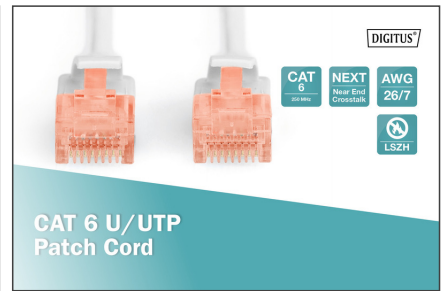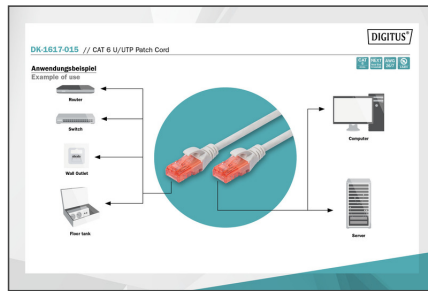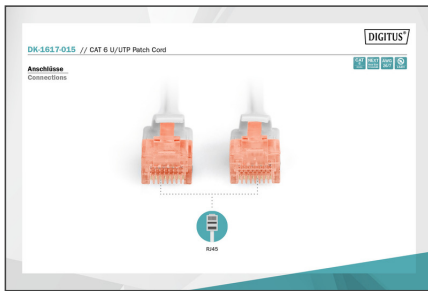

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Ensure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)