


DIGITUS® SSD/HDD Installation Frame for CD/DVD/Blu-ray drive slot, SATA to SATA III, 12.7 mm installation height

DA-71109

EAN 4016032390183

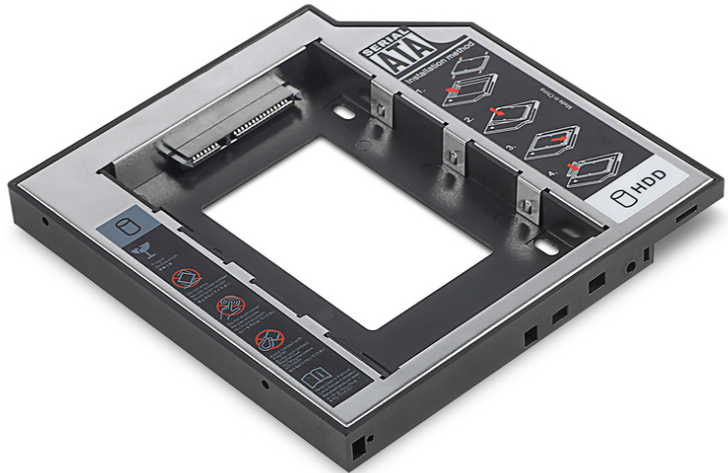

2nd SSD/HDD SATA Notebook Caddy for 2.5" SATA I-III SSD/HDD, 12.7mm

The DIGITUS® SSD/HDD mounting frame for the CD/DVD/Blu-ray drive slot is the perfect solution for upgrading your notebook. With this frame you can replace the optical drive (CD/DVD/Blu-ray) by a hard disk. Provide the frame with the original drive aperture and the exchange remains externally unremarkable. The frame corresponds to a shaft height of 12.7 mm and is designed for 2.5" SATA SSDs and HDDs. The DIGITUS® SSD/HDD mounting frame for the CD / DVD / Blu-ray drive slot is used in almost all optical drive bays with SATA interface. It serves the memory expansion through the use of a hard drive / SSD and allows faster access to your data it contains.

The perfect solution for simply upgrading the memory of your notebook

- Mounting frame for 2.5" SATA hard disks (HDD) and SSDs
- Suitable for almost all SATA drive bays with an installation height of 12.7 mm

- Universally designed aperture holder enables individual, optical adjustment
- Frame is made of aluminum for better heat dissipation
- Screwdriver included for easy installation
- Dimensions: 129 x 128 x 12.7 mm
- Supports Windows 10, 8.1, 8, 7, Vista, XP and Linux
- Compatible with SATA, SATA II and SATA III
- Data transfer speed of up to 6 Gbps
- Compatible with the new models from e.g. HP, DELL, ACER, BenQ, Asus, Lenovo, Great Wall
- Manufacturer diagnostic PIN, DIP switch can be changed depending on manufacturer support

Package contents

- SSD/HDD Installation Frame for CD/DVD/Blu-ray drive slot, SATA to SATA III, 12.7 mm installation height
- Manual

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	60	9.50	55.00	34.00	32.70	61.15
Packaging Unit Inside	1	0.16	15.20	16.00	3.60	875.52
Packaging Unit Single	1	0.16	15.20	16.00	3.60	875.52
Net single without Packaging	0	0.07	12.70	12.80	1.27	206.45

More images:



Safety notes

- Overloading can lead to overheating and damage to the appliance or the connected peripherals.
- If necessary, use an external power supply to ensure stable performance.
- If devices such as external hard disks or printers that require a high power consumption are connected, the device should be used with an external power supply. Otherwise, the device could be overloaded or functional problems could occur.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com