


# DIGITUS HDMI High Speed connection cable with Ethernet, type A, high flexible

DB-330120-020-S  
EAN 4016032391319

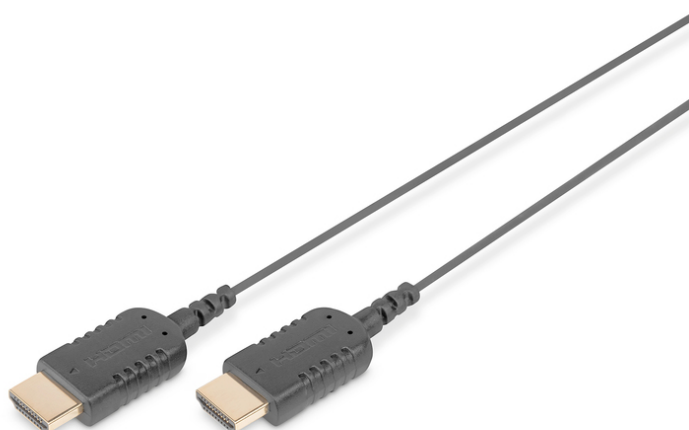

## HDMI High Speed connection cable, type A, HighFlex M/M, 2.0m, 4K Ultra HD@30Hz, active,

This UHD and Full 3D capable cable is used to connect audio-video devices with Mini HDMI (Type C) interface, such as notebooks, to a TV, monitor or PC. The double shielded cable connects an HDMI socket with a Mini HDMI socket. ARC & CEC and resolutions up to 4K are supported. In addition, this cable transmits network signals from compatible devices, you do not need a separate Ethernet cable. The cable is also characterized by a small diameter and highest flexibility.

### Connect devices with HDMI jacks to Mini HDMI jacks - with Ethernet over HDMI

- Supports 4K/2K with 30Hz
- Supports 3D
- Supports Audio Return Channel (ARC)
- Supports Consumer Electronic Control (CEC)

- Supports Ethernet over HDMI




### Attributes

- AWG: 30
- HDMI-norma: HDMI velike brzine s Ethernetom
- HDTV-norma: Ultra HD 4K
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: HDMI tip A, utikač
- Konektor 2: HDMI tip A, utikač
- Konektor u boji: crni
- Materijal žice: CU
- Površina konektora: pozlaćeno
- Duljina: 2 m
- AOC - aktivni optički kabel: Ne
- oklop: dvostruki oklop

## Logistics

|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| Packaging Unit Carton        | 100          | 4.70        | 50.00      | 35.00      | 39.50       | 69,125.00       |
| Packaging Unit Inside        | 1            | 47.00       | 9.50       | 7.50       | 3.60        | 256.50          |
| Packaging Unit Single        | 1            | 47.00       | 9.50       | 7.50       | 3.60        | 256.50          |
| Net single without Packaging | 0            | 0.03        | 2.00       | 1.00       | 1.00        | 2.00            |

## More images:

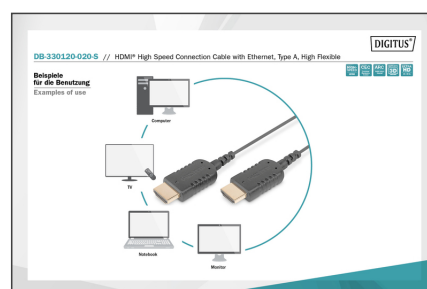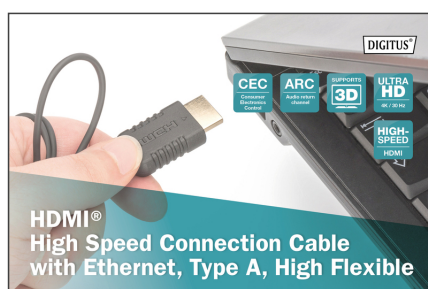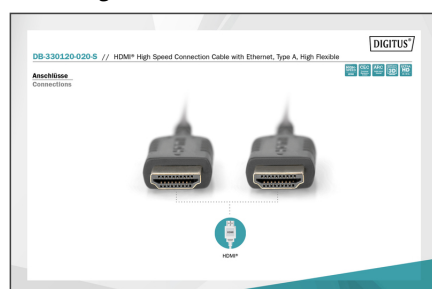

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schöffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)