

# DIGITUS Mini HDMI Extender Set

DS-55203

EAN 4016032435006



## Mini HDMI Extender Set, Full HD, 1080p 50m, CAT 6/6A/7, powered via Micro USB cable, bk

The Mini HDMI Extender Set from DIGITUS extends the maximum length for HDMI cables to up to 50 m whereby only a simple network cable (Cat 6/6A) is used between a transmitter and a receiver unit. Supports a maximum video resolution of 1080p/60Hz. The power supply is provided by the included Micro USB cable, whereby only one unit must be power supplied. Thanks to this feature and the ultra compact design, the Extender Set can be positioned easily and discreetly almost everywhere. Position your screen wherever you want.

### Extends the maximum length for HDMI cables to up to 50 m whereby only a simple network cable is used between a sender and a receiver unit

- Extends the maximum length for HDMI cables to up to 50 m whereby only a simple network cable is used between a sender and a receiver unit
- Extends Full HD video content to up to 50 m using a CAT 6/6A/7 cable
- Supports resolutions to up to 1080p/60Hz
- Power supply via a Micro USB cable - Use the USB port of your PC/laptop, a USB charger, etc. to supply power to the extender
- Supports PoE - Only one unit must be power supplied using the Micro USB cable
- Ultra compact design - can be positioned easily and discreetly almost everywhere

- Offers simple and quick distribution for HDMI video signals - position your monitors wherever you wish
- Supports HDCP 1.2
- Supports CAT 6, CAT 6A, CAT 7 network cables
- Complies with the IEEE-568B standard
- HDMI bandwidth: 10.2 Gps (max.)
- Housing: ABS Plastic
- Operating temperature: 0 ~ 50° C
- Ambient temperature: -10 ~ 70° C
- Air humidity (no condensation): 0 ~ 90%
- Dimensions (1 unit): L 7.1 x W 2.6 x H 1.1 cm
- Weight (1 unit): 10 g
- Color: Black

### Attributes


- HDTV Resolution max.: 1920 x 1080 Pixel, 60Hz
- HDTV Standard: Full HD
- Category: CAT 6
- Distance: 50 m
- KVM: no
- PoE (Power over Ethernet): yes

### Package contents

- 1x Mini HDMI Extender Transmitter Unit
- 1x Mini HDMI Extender Receiver Unit
- 2x Micro USB Cable (1.0 m)
- User manual

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	60	9.60	43.00	33.00	38.00	53,922.00
Packaging Unit Inside	1	0.16	11.40	7.80	5.80	515,736.00
Packaging Unit Single	1	0.16	11.40	7.80	5.80	515,736.00
Net single without Packaging	0	0.02	7.15	2.60	1.15	21.38

## More images:

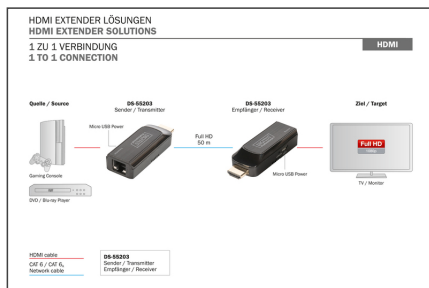

## Safety notes

- If the device is powered by a plug-in power supply, ensure that the power adapter is connected correctly and meets the specified requirements (e.g. voltage and current).
- Only use certified CAT5e or CAT6 cables to ensure stable signal transmission.
- For particularly long cable runs or in environments prone to interference, it is recommended to use shielded network cables.
- Make sure that all connections are tight and secure to avoid loose contacts that could affect the signal quality. Make sure that the HDMI and Ethernet connections are connected correctly.
- Make sure that the CAT cable is not laid near high-voltage power lines or other strong sources of electromagnetic interference to avoid signal interference.
- Only operate the device within the specified temperature range.
- Do not use the device outdoors or in damp or wet environments
- Check all connections and cables regularly for wear or damage. Cables and connections can wear out, especially with frequent use or long installations, which can lead to poor signal quality or system failure.

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)